

Do you stop creating on your workstation to render? Are you creating by day, rendering by night? With *Render*BOXX, you can easily set up a solution for dedicated rendering that will allow you to work at an entirely new level of efficiency.

Designed exclusively for digital content creation with production-proven components, *Render*BOXX® provides XXtreme processing power to reduce render times and increase throughput.

Choice of dual AMD or Intel processors.

Dual-boot capable: Microsoft Windows® and Linux® compatible.


Small 1RU form factor with 25" depth for compact racking.

Heavy-duty power supply.

All-aluminum chassis for lighter rack loads and rapid, efficient heat dissipation.

Custom designed cooling solution.

Three-year warranty.

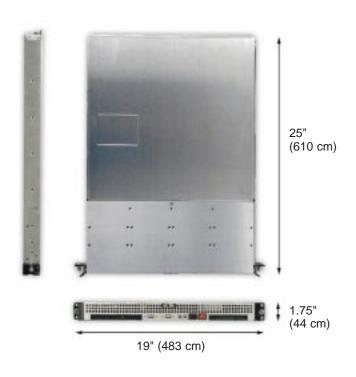

8104 DUAL INTEL® XEON™ PROCESSORS

Dual Intel XEON processors 533/400 MHz system bus Intel E7501 chipset

Up to 12GB dual-channel DDR 266 memory (6) DIMM slots

8MB ATI® RAGE™ XL graphics adapter (PCI) Dual-channel UltraDMA 100 IDE controller

- (1) PCI-X full-length slot
- (1) Onboard 10/100/1000Mbs Ethernet adapter
- (1) Onboard 10/100Mbs Ethernet adapter
- (4) USB ports: (2) front, (2) rear
- (4) 3.5" x 1" Internal hard drive bays

Microfloppy drive (MicroCD drive optional)

1U Aluminum rackmount chassis

Physical dimensions: 19" W x 1.7" H x 25" D

(24" rackmount depth) 350W power supply

7004 DUAL ATHLONTM PROCESSORS

Dual AMD Athlon processors
AMD 760 MPX chipset
Up to 4GB 266 MHz DDR
(4) DIMM slots
4MB ATI RAGE XL graphics adapter (PCI)

4MB ATI RAGE XL graphics adapter (PC Dual-channel Ultra320 SCSI controller

Dual-channel UltraDMA 100 IDE controller

- (1) 64/66 Full-length PCI slot
- (1) Onboard 10/100/1000Mbs Ethernet adapter
- (1) Onboard 10/100Mbs Ethernet adapter
- (3) USB ports: (1) front, (2) rear
- (4) 3.5" x 1" Internal hard-drive bays

Microfloppy drive

1U Rackmount aluminum chassis

Physical dimensions: 19" W x 1.7" H x 25" D (24" rackmount depth)

350W power supply

7104 DUAL OPTERONTM PROCESSORS

Dual AMD Opteron processors AMD 760 MPX chipset Up to 16GB DDR 400 memory

(4) DIMM slots

4MB ATI RAGE XL graphics adapter (PCI) Dual-channel UltraDMA 100 IDE controller

- (1) PCI-X full-length slot
- (1) Onboard 10/100/1000Mbs Ethernet adapter
- (1) Onboard 10/100Mbs Ethernet adapter
- (3) USB ports: (1) front, (2) rear
- (4) 3.5" x 1" Internal hard-drive bays

Microfloppy drive

1U Rackmount aluminum chassis

Physical dimensions: 19" W x 1.7" H x 25" D

(24" rackmount depth)

350W power supply

"BOXX is devoted to making tools for content creators and they offer the best 'bang for your buck' without sacrificing quality."

Greg Punchatz,
Director of Animation — Janimation



Note: All specifications are subject to change without notice.

Warranty: Three year warranty with 24-hour parts replacement during the first year. Additional support packages available, including on-site support in selected areas.







BOXX Technologies, Inc. 1.877.877.BOXX | 512.835.0400 www.boxxtech.com | sales@boxxtech.com

BOXX and *Render*BOXX are registered trademarks of BOXX Technologies, Inc. registered in the U.S. Patent and Trademark Office. Other trademarks and registered trademarks herein are the property of their respective owners.