


LA
601

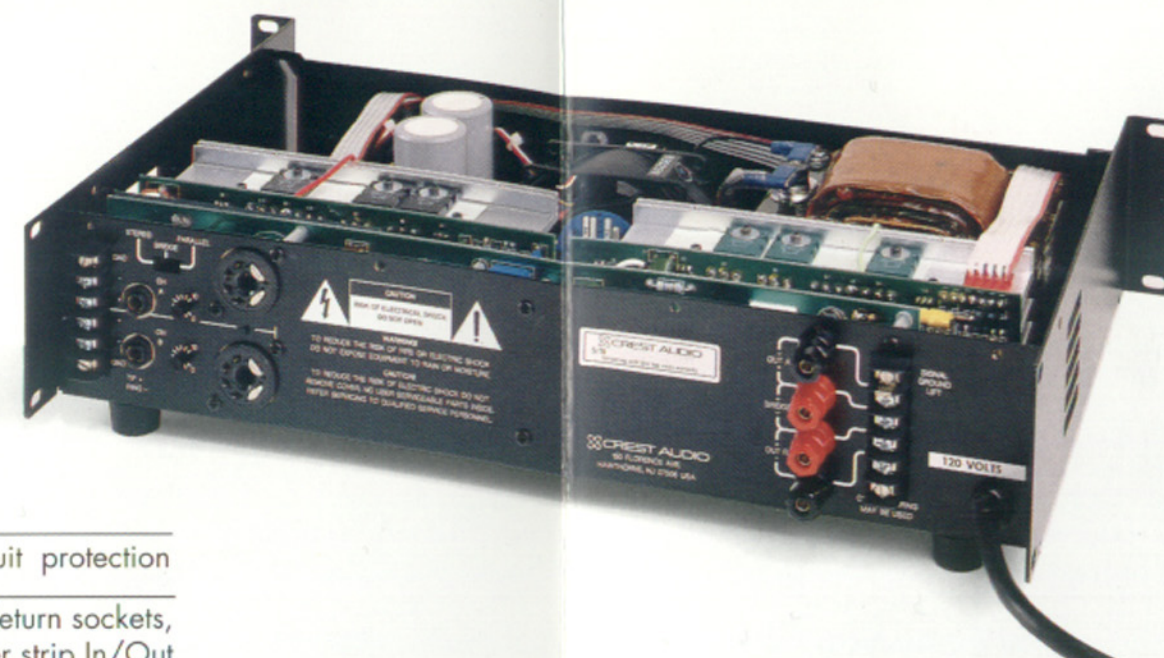


Frequency Response	20 Hz - 20 kHz; +0, -5dB at 200W
THD	< 0.025% @ 200W into 4 ohms, 1kHz
Input Sensitivity	.775V (0 dBu) for full power at 8 ohms
Hum and Noise	-103.7dB, "A" weighted

Protection	High temp., DC, turn-on, and short circuit protection		
Connectors (per Ch.)	1/4" TRS jack (bal.), Octal Send/Return sockets, 5-way binding posts Out, Barrier strip In/Out		
Indicators (per Ch)	Bi-color status LED, clip LED		
Dimensions	3.5" x 19" x 11.5" (8.9cm x 48.3cm x 29.2cm)		
Cooling	Variable-speed DC fan	Net Weight	28 lbs (12.7 kg)
Warranty	2 years, parts and labor*		

POWER SPECIFICATIONS	FTC ¹	EIA
	20 Hz - 20kHz <0.1% THD	at 1kHz 0.05% THD
8 ohms stereo	120 watts	150 watts
4 ohms stereo	225	275
8 ohms bridged	400	440

LA
901

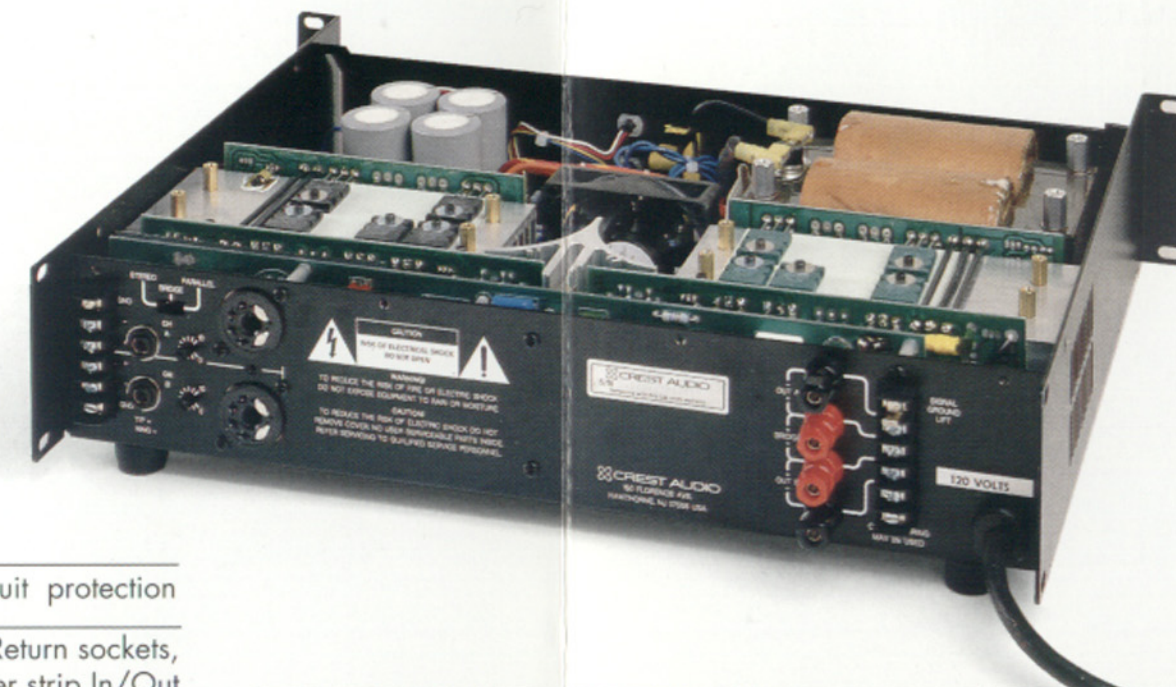

Frequency Response	20 Hz - 20 kHz; +0, -5dB at 300W
THD	< 0.025% @ 300W into 4 ohms, 1kHz
Input Sensitivity	.775V (0 dBu) for full power at 8 ohms
Hum and Noise	-103.7dB, "A" weighted

Protection	High temp., DC, turn-on, and short circuit protection		
Connectors (per Ch.)	1/4" TRS jack (bal.), Octal Send/Return sockets, 5-way binding posts Out, Barrier strip In/Out		
Indicators (per Ch)	Bi-color status LED, clip LED		
Dimensions	3.5" x 19" x 14" (8.9cm x 48.3cm x 35.6cm)		
Cooling	Variable-speed DC fan	Net Weight	34.5 lbs (15.7 kg)
Warranty	2 years, parts and labor*		

POWER SPECIFICATIONS	FTC ¹	EIA
	20 Hz - 20kHz <0.1% THD	at 1kHz 0.05% THD
8 ohms stereo	225 watts	280 watts
4 ohms stereo	300	350
8 ohms bridged	600	750