

## TAPPED HORN COMMERCIAL PRO SUBWOOFERS

The THmini was designed with the small band/weekend warrior in mind; who in most cases must setup and tear down on their own with nothing more than a hand truck.



Simply but boldly stated, there is no other product on the market today which matches the Mini's level of performance and fidelity in a sub-compact size. Multiples may be used for bass arrays.

### Specifications

Operating Frequency Range .....48 Hz - 200 Hz - 3 dB  
 .....41 Hz -10dB  
 Sensitivity @ 1M.....101 dB SPL  
 .....(Referenced to 2.83V @1M ½ space, measured as 28.3V @ 10M)  
 Maximum Output ..... 129 dB SPL/135 dB SPL Peak  
 Input Power Ratings.....700 W continuous, 2800 W Peak  
 Nominal Impedance .....8 ohms  
 Minimum Impedance.....7 ohms @ 50 Hz  
 Recommended Processing .....40 Hz HP @ 24 dB/Butterworth  
 Drivers.....LF 1 x 12" Long excursion  
 Input Connections.....2-NL4MP  
 Enclosure Material .....13ply, 18mm Baltic Birch, polyurea coated

# THmini

Extremely Compact  
Subwoofer

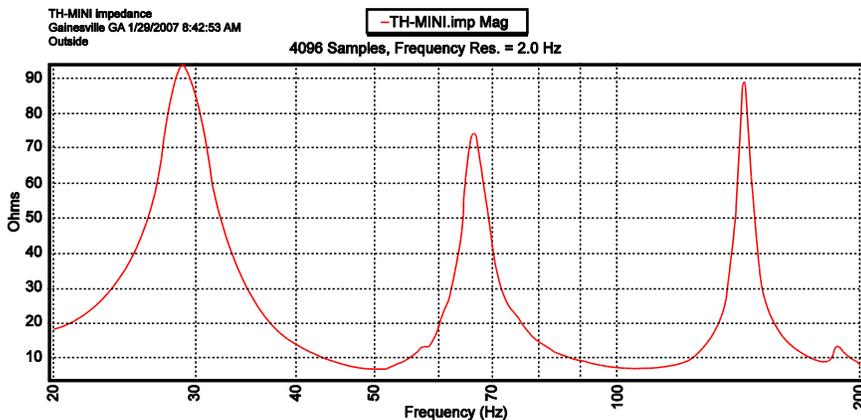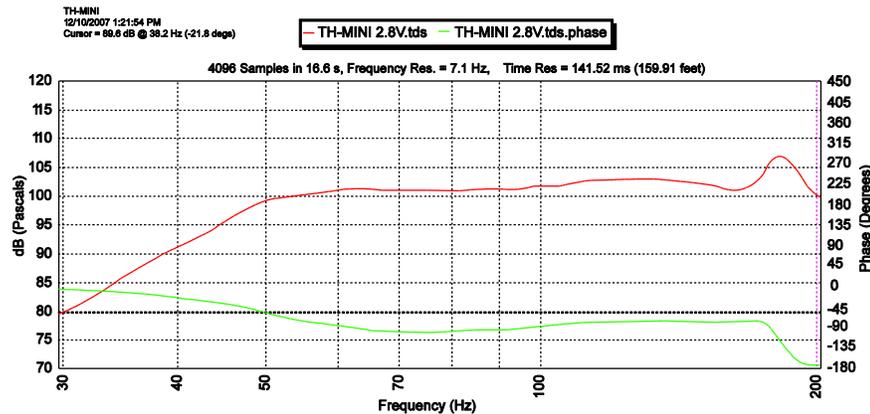

### Accessories

Available Touring or Install  
Weatherized options available

### PERFORMANCE DATA

Model	Max SPL	Sensitivity	Magnitude Response	Power Rating	Dimensions (in.)	Weight
THMINI	135 dB	101 dB	48 Hz – 200 Hz	1,400 W	24 x 15 x 24	76 lbs

### **Architect/Engineers Specs**

The subwoofer loudspeaker shall utilize one 12" long excursion transducer in a patent-pending enclosure. The subwoofer shall have an operating range of 48 Hz- 200 Hz - 3 dB with sensitivity of 101 dB SPL, 129 dB SPL/135 dB SPL peak. Power handling shall be 700 Watts continuous, 1400 Watts program. The impedance shall be nominal 8 ohms.

The loudspeaker shall be constructed of 13 ply Baltic birch, water resistant Polyurea coated, properly braced for the intended use and a rugged steel grill. The connectors shall be Neutrik NL4. The Loudspeaker shall be the Danley Sound Labs TH MINI.