

HARDIGG® RACK CASES: **SUPERIOR SHIPPING PROTECTION FOR** **FRAGILE INSTRUMENTS & ELECTRONICS**






HARDIGG RACK CASES: SUPERIOR SHIPPING PROTECTION FOR FRAGILE INSTRUMENTS & ELECTRONICS

Hardigg Cases are world renowned as the toughest, smartest transport systems available for commercial, industrial and military shippers. Our innovative design process and rigorous testing methods continue to result in superior patented advancements that ensure your vital, sensitive and expensive electronics remain protected. Hardigg Rackmount Cases can take repeated drops, blows and soakings while protecting your gear inside. Nothing protects better than Hardigg Cases when it comes to electronics. From the ultimate protection of a Classic Rack, to the removable rack option offered by SuperMAC, to the smaller footprint MAC Rack and ProRack – Hardigg has the solution to fit your exact shipping and protection requirements.

All Hardigg Rackmount Cases boast rugged rotomolded exterior shells that withstand all kinds of abuse, drop after drop, in every environment – damage free.

ALL HARDIGG RACK CASES FEATURE:

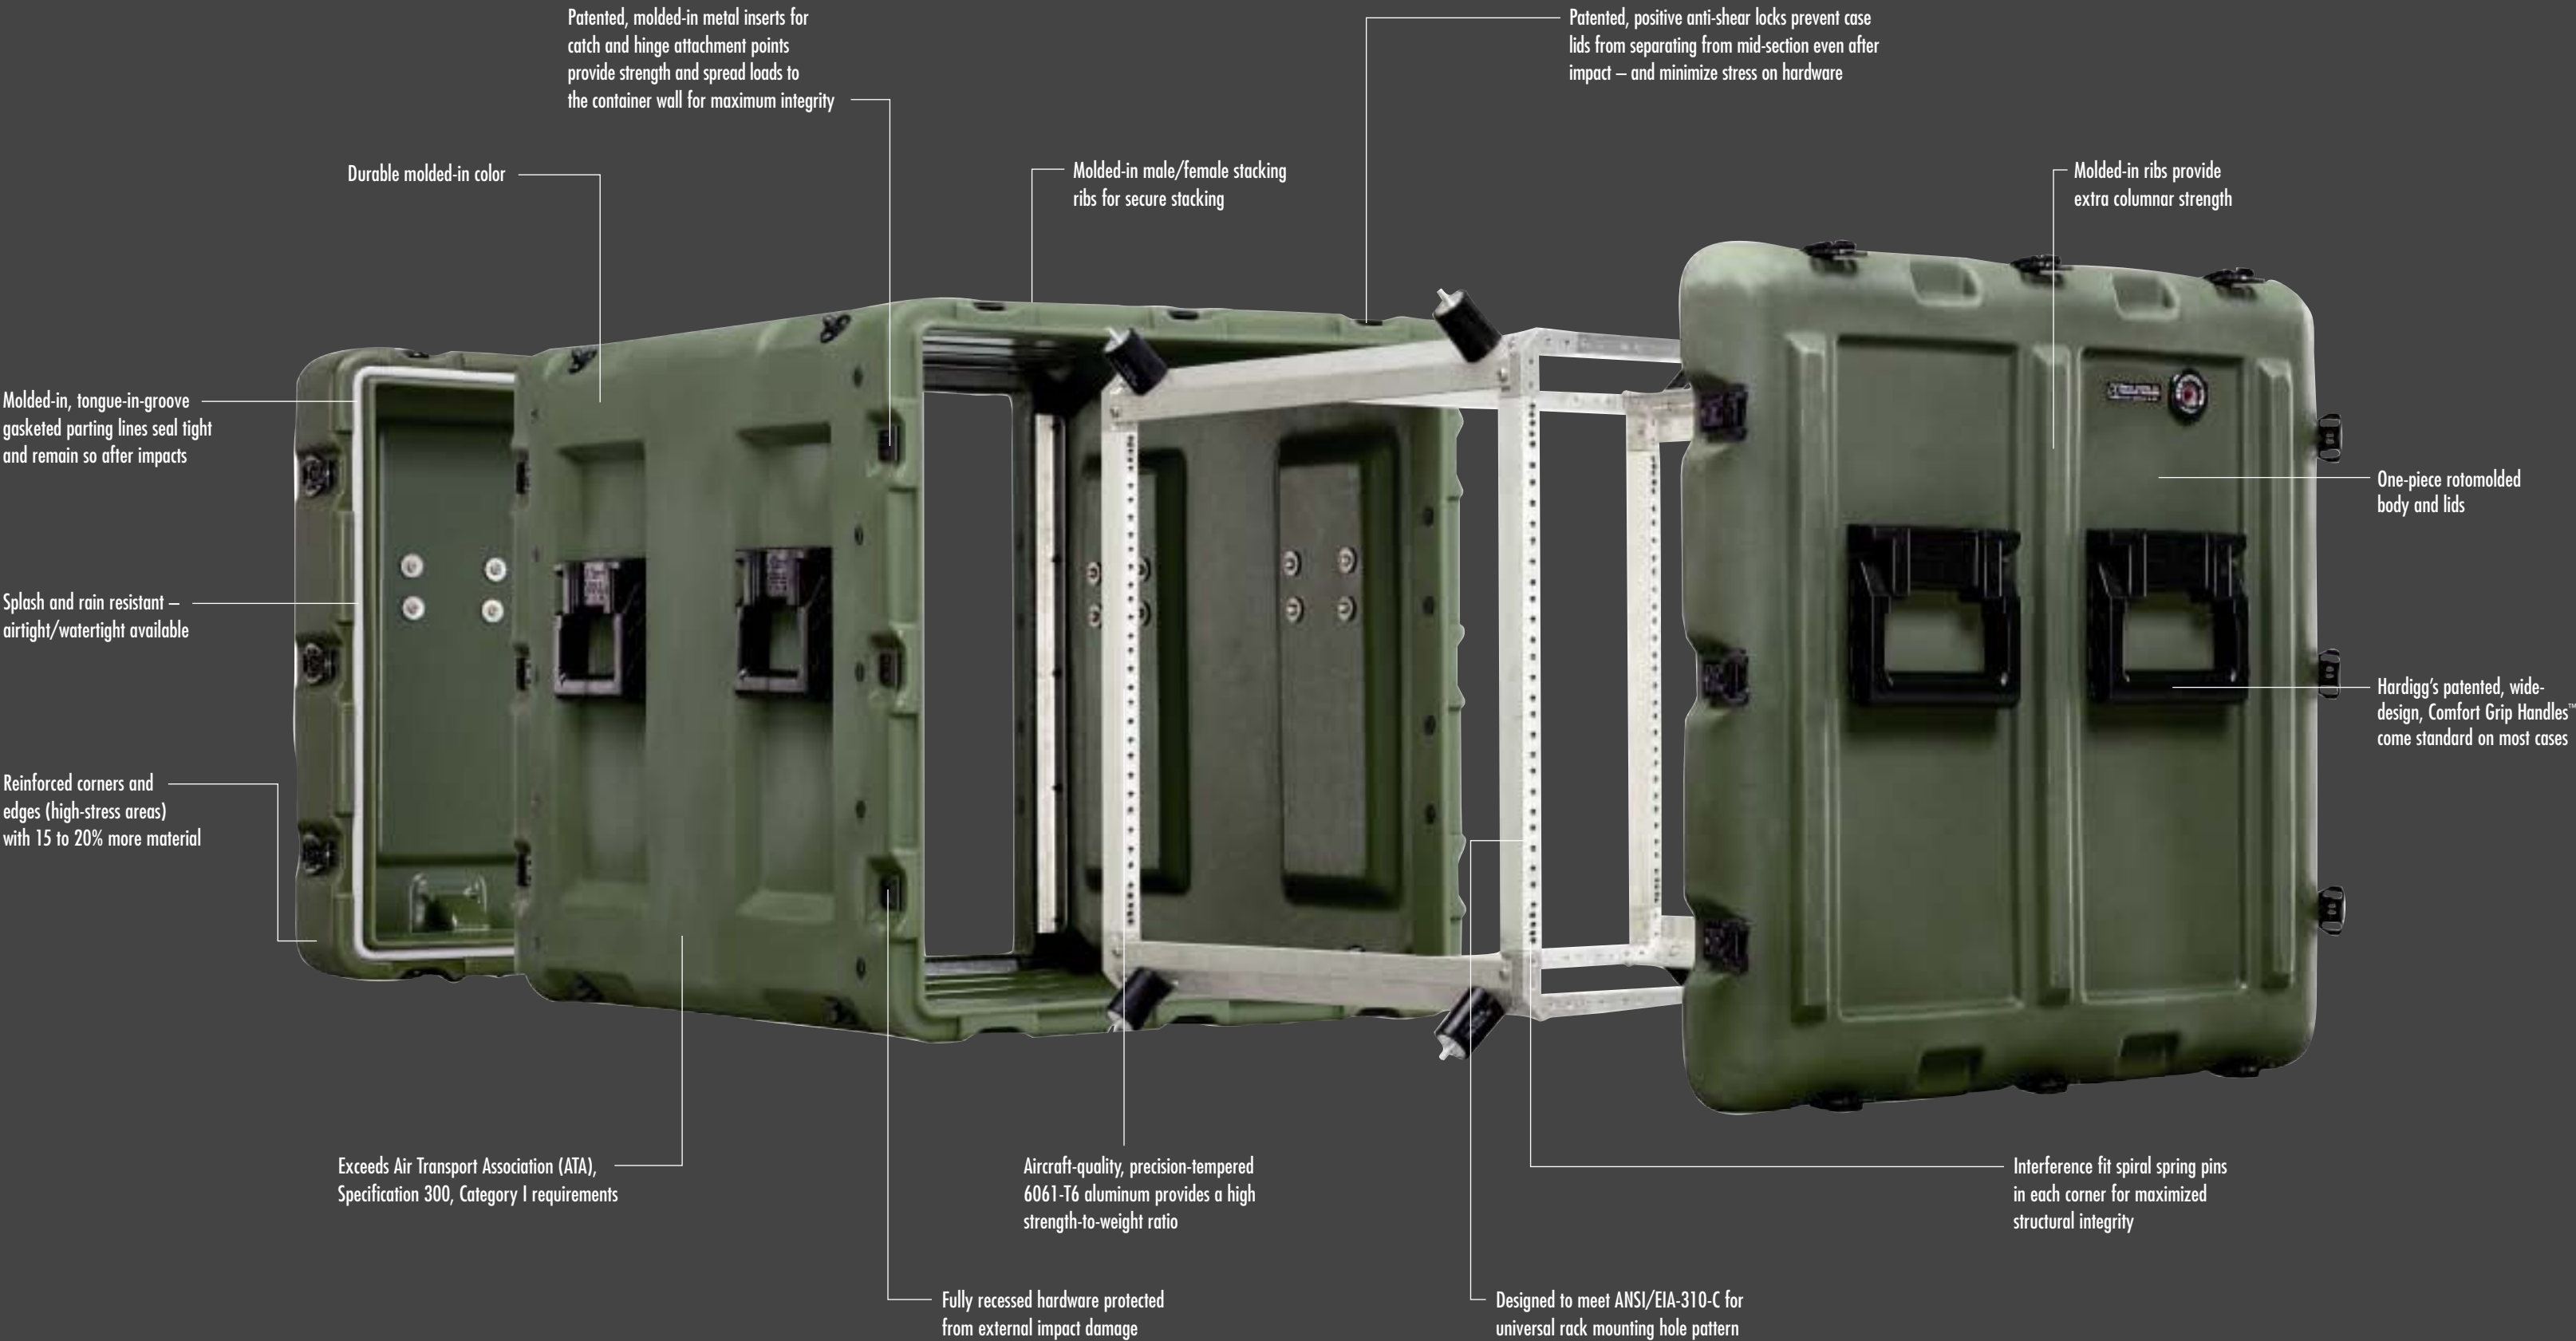

HARDIGG CASES®

CHOOSING THE PERFECT RACKMOUNT CASES

From the most delicate equipment to slightly more rugged electronics, Hardigg has a case with the perfect combination of shock and vibration protection and portability. Use this basic guide to help find the exact configuration of access and stabilizing security suited to your specific needs. If you require a case with a capacity beyond 340 lbs., please contact us for more options or custom solutions. When it comes to transporting and protecting equipment in use, nobody matches Hardigg’s experience or dedication.



Classic Rack™

- The best shock and vibration protection available.
- Protection for equipment from 20-340 lbs.
- Equipment typically will have 15-30 G fragility.
- Ideal for rack mountable precision test, electro-mechanical, medical and biological diagnostic equipment, memory storage devices, meteorological instruments, mobile operations, broadcast and video gear, laboratory equipment, aerospace instrumentation, servers, military mission planning, command and control equipment, and flight simulators.



SuperMAC™

- A space-saving, lightweight case with a removable rack option.
- Protection for equipment from 20-200 lbs.
- Equipment typically will have 40-70 G fragility.
- Ideal for field-deployed equipment and sheltered applications. Typical uses include control consoles and panels, radar and microwave antennas, solid-state circuit electronics, or radio, TV and communications equipment.



MAC Rack™

(Mobile, Accessible, Compact)

- Ideal for semi-ruggedized equipment that requires good shock and vibration protection in a light, compact case.
- Protection for equipment from 20-200 lbs.
- Equipment typically will have 50-80 G fragility.
- Ideal for field-deployed and sheltered applications. Typical uses include solid-state circuit electronics, radar and microwave antennas, control consoles and panels, or radio, TV and communications equipment.




ProRack™

- Lightweight, space-efficient, front and rear opening transport container (not a shock mounted/cushioned rackmount system) for field ruggedized equipment.
- Designed for equipment up to 75 lbs.
- Equipment typically will have 80-120 G fragility.
- Rugged 18" deep cases with aircraft aluminum frame suspended on plastic fins to protect your gear from direct impact transmission.
- Often used for field-deployed amplifiers and electronic, medical or testing equipment components.



The fragility of an item is normally expressed in “G” units. G units are a measure of the force exerted on bodies by the earth’s gravitational pull. The larger the G force needed to cause breakage, the less protection necessary from shock and vibration.

For instance, an item with 20 G fragility will suffer damage when subjected to a force 20 times that of normal earth gravity. The fragility of an instrument or piece of equipment is usually determined by laboratory testing.

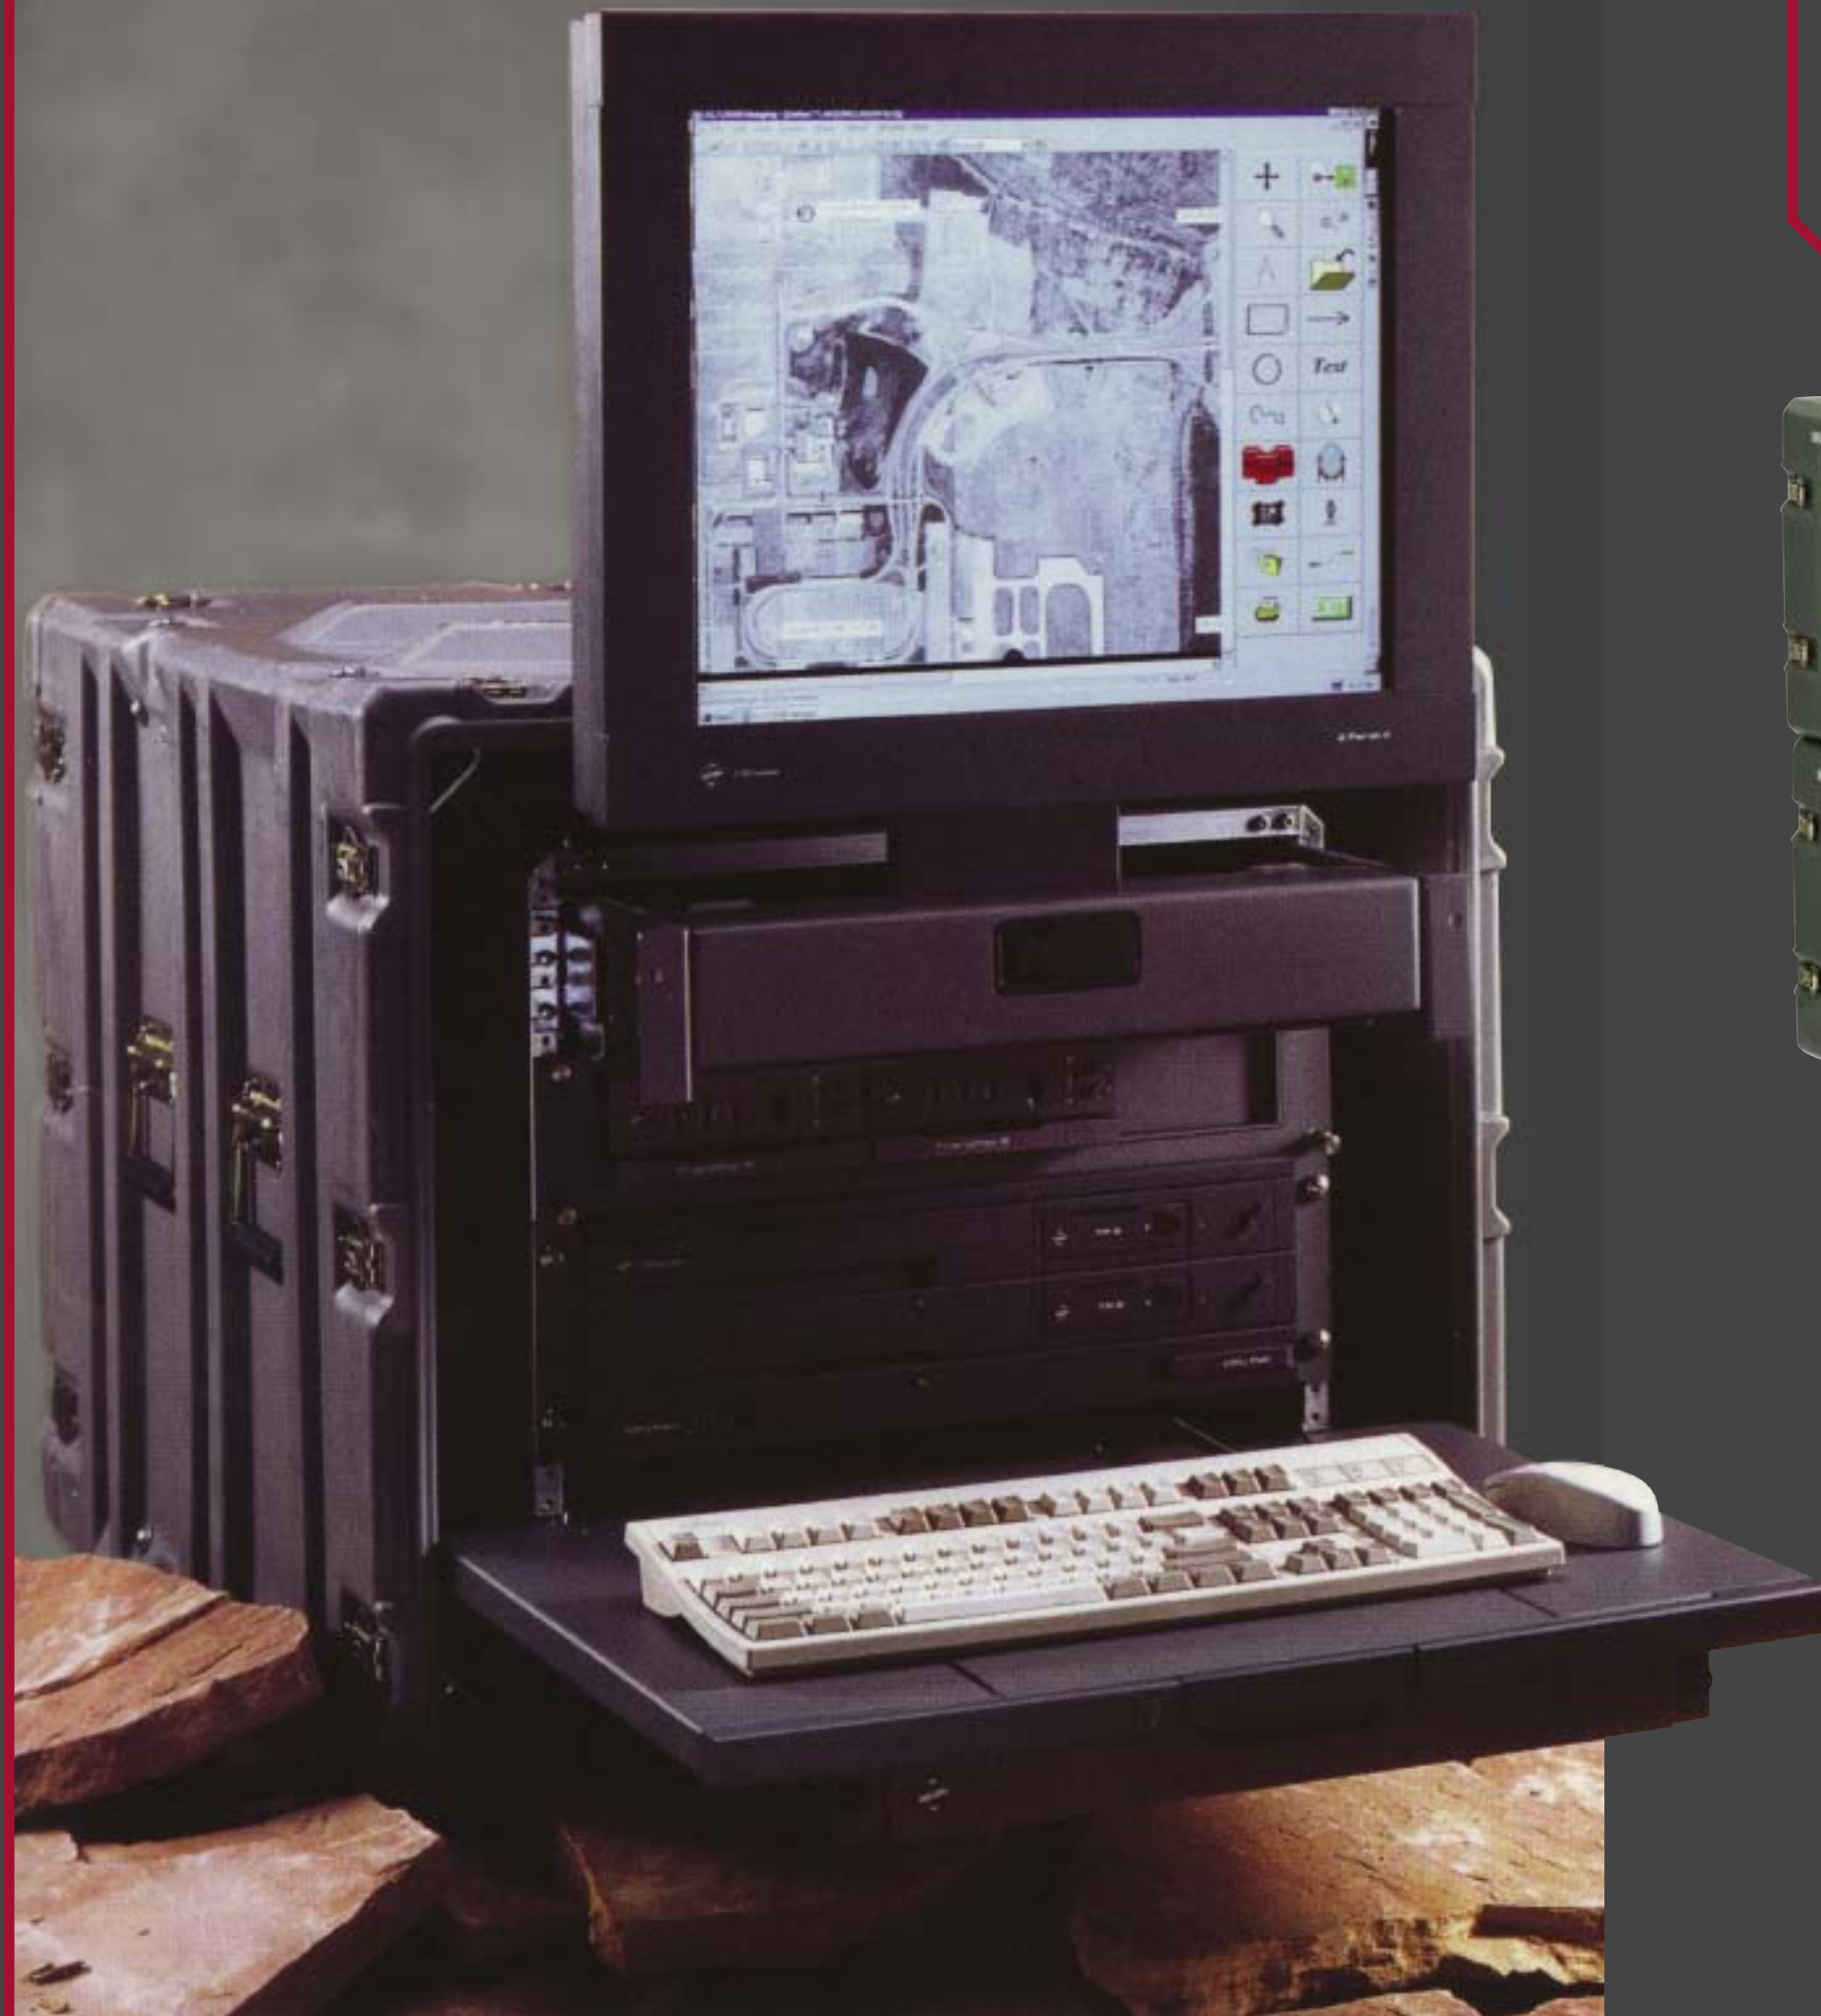

HARDIGG CLASSIC RACK CASES

THE ULTIMATE SHOCKPROOF SOLUTIONS



Hardigg's extra rugged, rotomolded Classic Rackmount Cases have demonstrated their strength thousands of times over by saving ultra-fragile equipment from damage during transport. Our proven 19" EIA Classic Rack is the strongest, most secure rack in the industry. Our precision-tuned, elastomeric, shock mount systems provide maximum protection for ultra-fragile equipment from shock and vibration – nothing protects better than a Classic Rack from Hardigg.

Classic Racks are usually intended for equipment that requires the best protection available. This equipment might be subjected to severe drop heights or require extra protection to provide peace of mind that your equipment will arrive in one piece and work the minute it is plugged in.

- Ideal for delicate equipment that requires the most protection available, in the widest range of sizes.
- Individually fine-tuned shock mounts for each application provide excellent shock and vibration dampening plus cooling airflow for operating equipment.
- Security for equipment from 20-340 lbs. For weights over 340 lbs., please call Hardigg for a custom solution.
- Recessed, zinc-plated, yellow chromate hardware holds up under duress and use.



HARDIGG SUPERMAC CASES


SUPERIOR COMPACT MOBILITY FOR RACK-MOUNTED EQUIPMENT

SuperMAC is our most compact container with a removable rack option, making field deployment and equipment integration easier than ever before. SuperMAC's innovative design makes strategic use of every interior inch, allowing ample space for wiring and equipment integration while providing medium duty protection. The optional Rapid Rack™ removable rack slides open as easily as a file drawer, allowing full access to equipment. Sensitive electronic equipment mounted in a SuperMAC case can survive the day-to-day falls, vibrations and other stressors that cause competitors' rack cases to fail.




SuperMAC is ideal for field-deployed equipment and sheltered applications from 20-200 lbs. that require medium duty shock and vibration protection in a portable, space-saving case. Equipment typically will have 40-70 G fragility.

- Textured low visibility finish for unobtrusive storage and transport.
- Patented Comfort Grip Handles™ make lifting easy.
- Recessed, cobalt black hardware is long-lasting and fastens securely.
- 24" wide – two cases can fit side-by-side in most military vehicles.
- Molded-in lid hangers allow lid to hang easily from the side of the case.
- Molded-in rib design provides secure stacking and interlock.
- Patent pending shock mount design.
- Removable rack features Lock 'N Load™, a quick latch system that locks racks securely into place for transit, unlike competitive models that can slide freely upon impact.

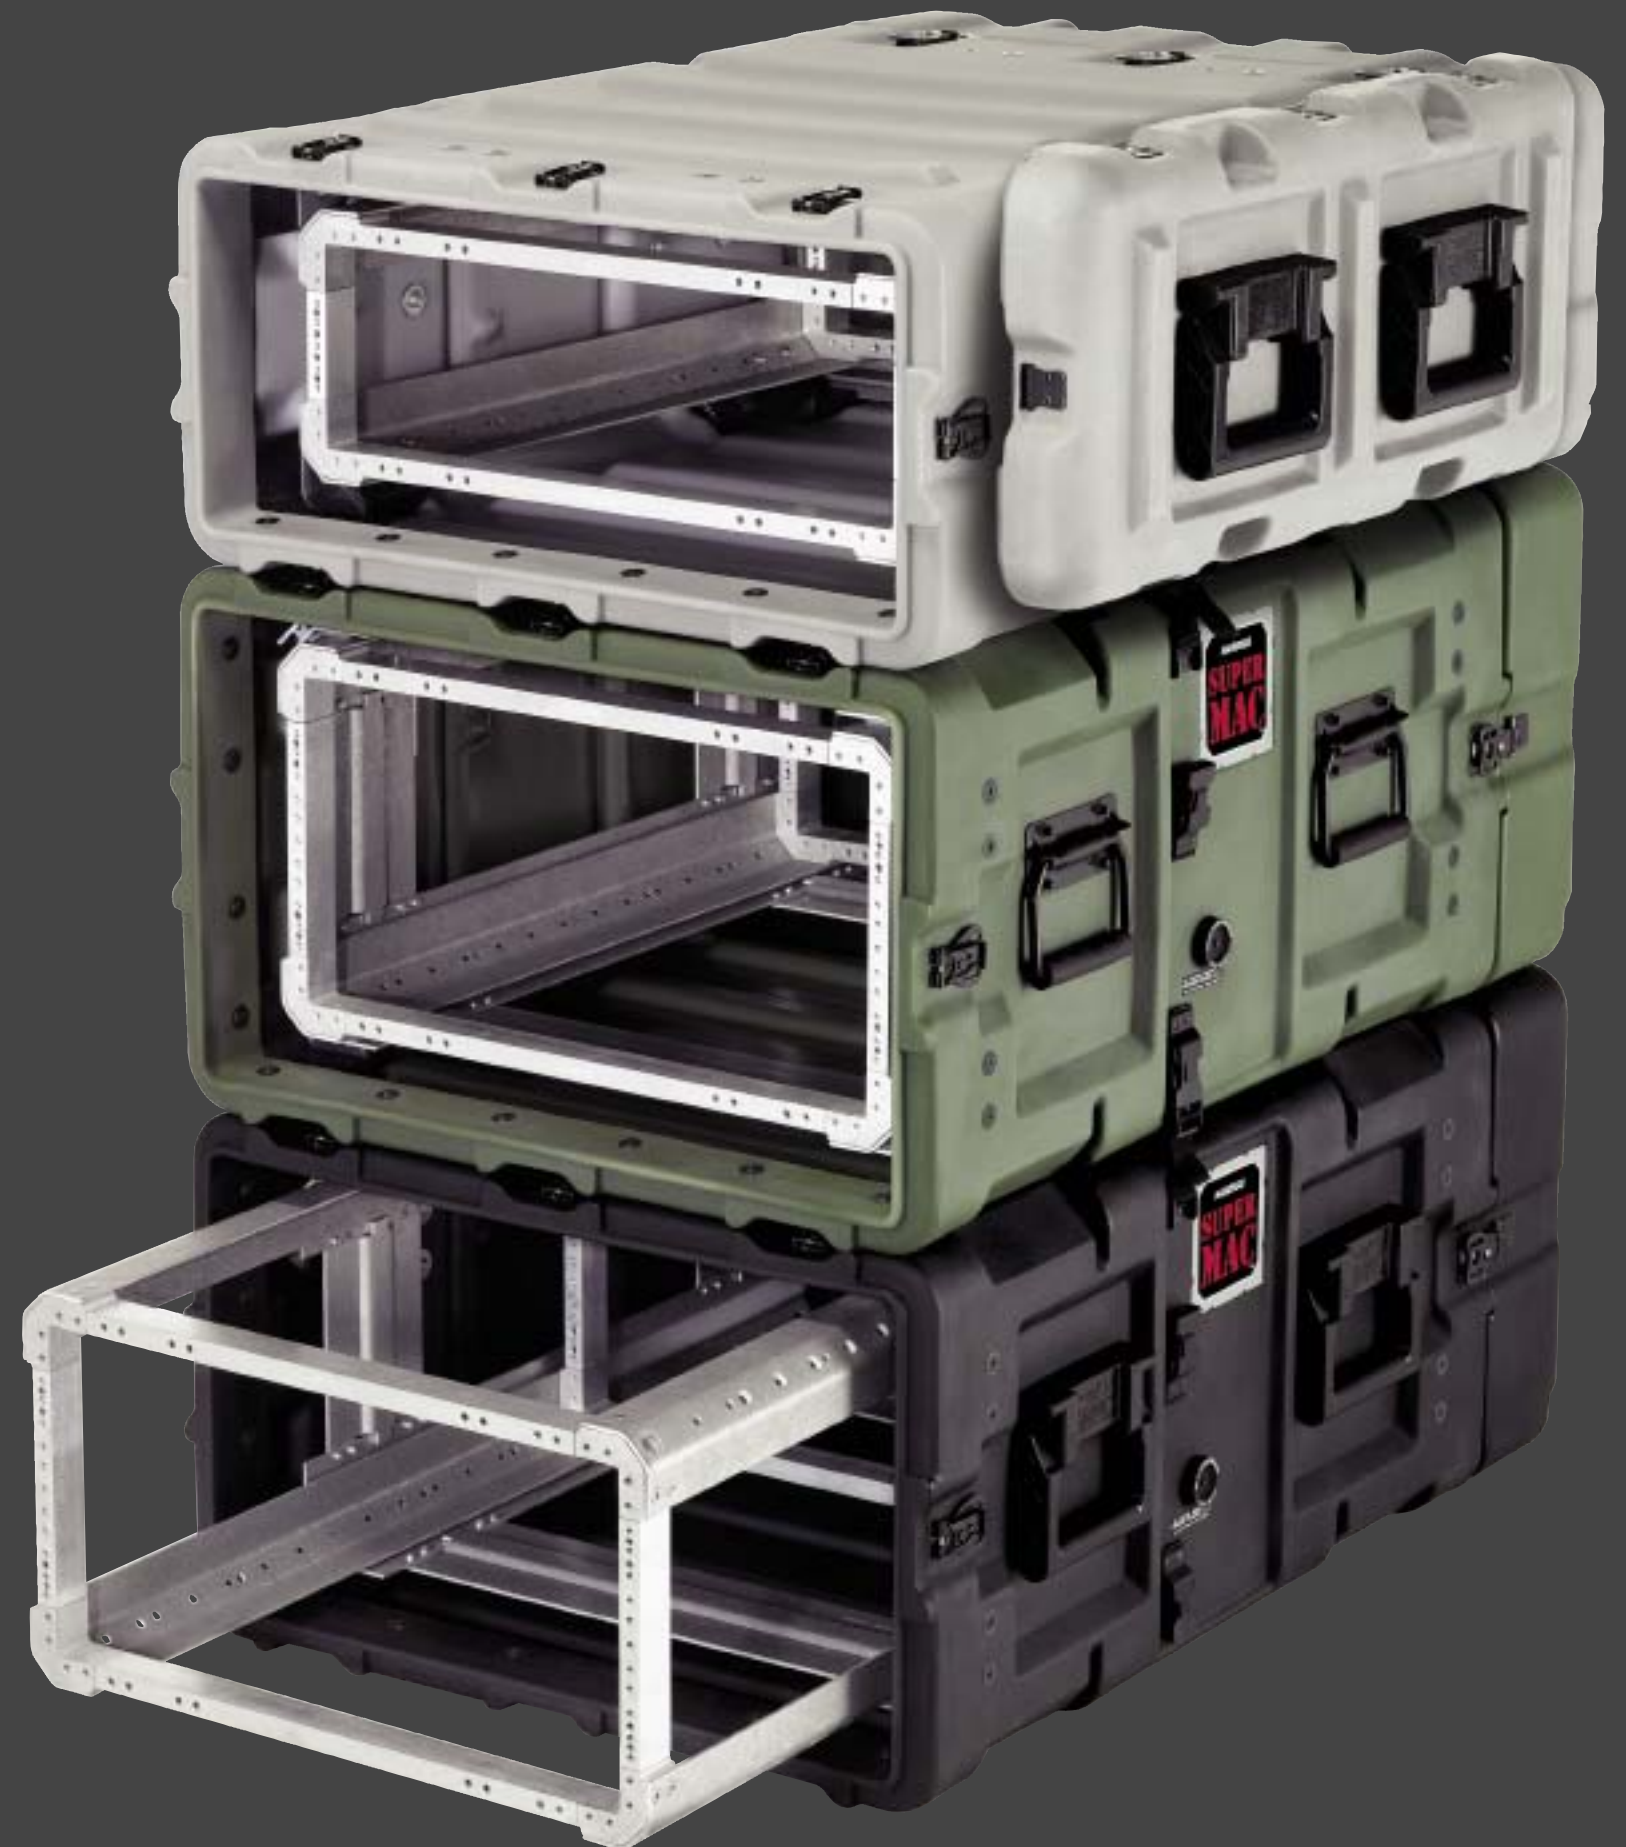

HARDIGG MAC RACK CASES

COMPACT, LIGHTWEIGHT & SHOCKPROOF TRANSPORTS

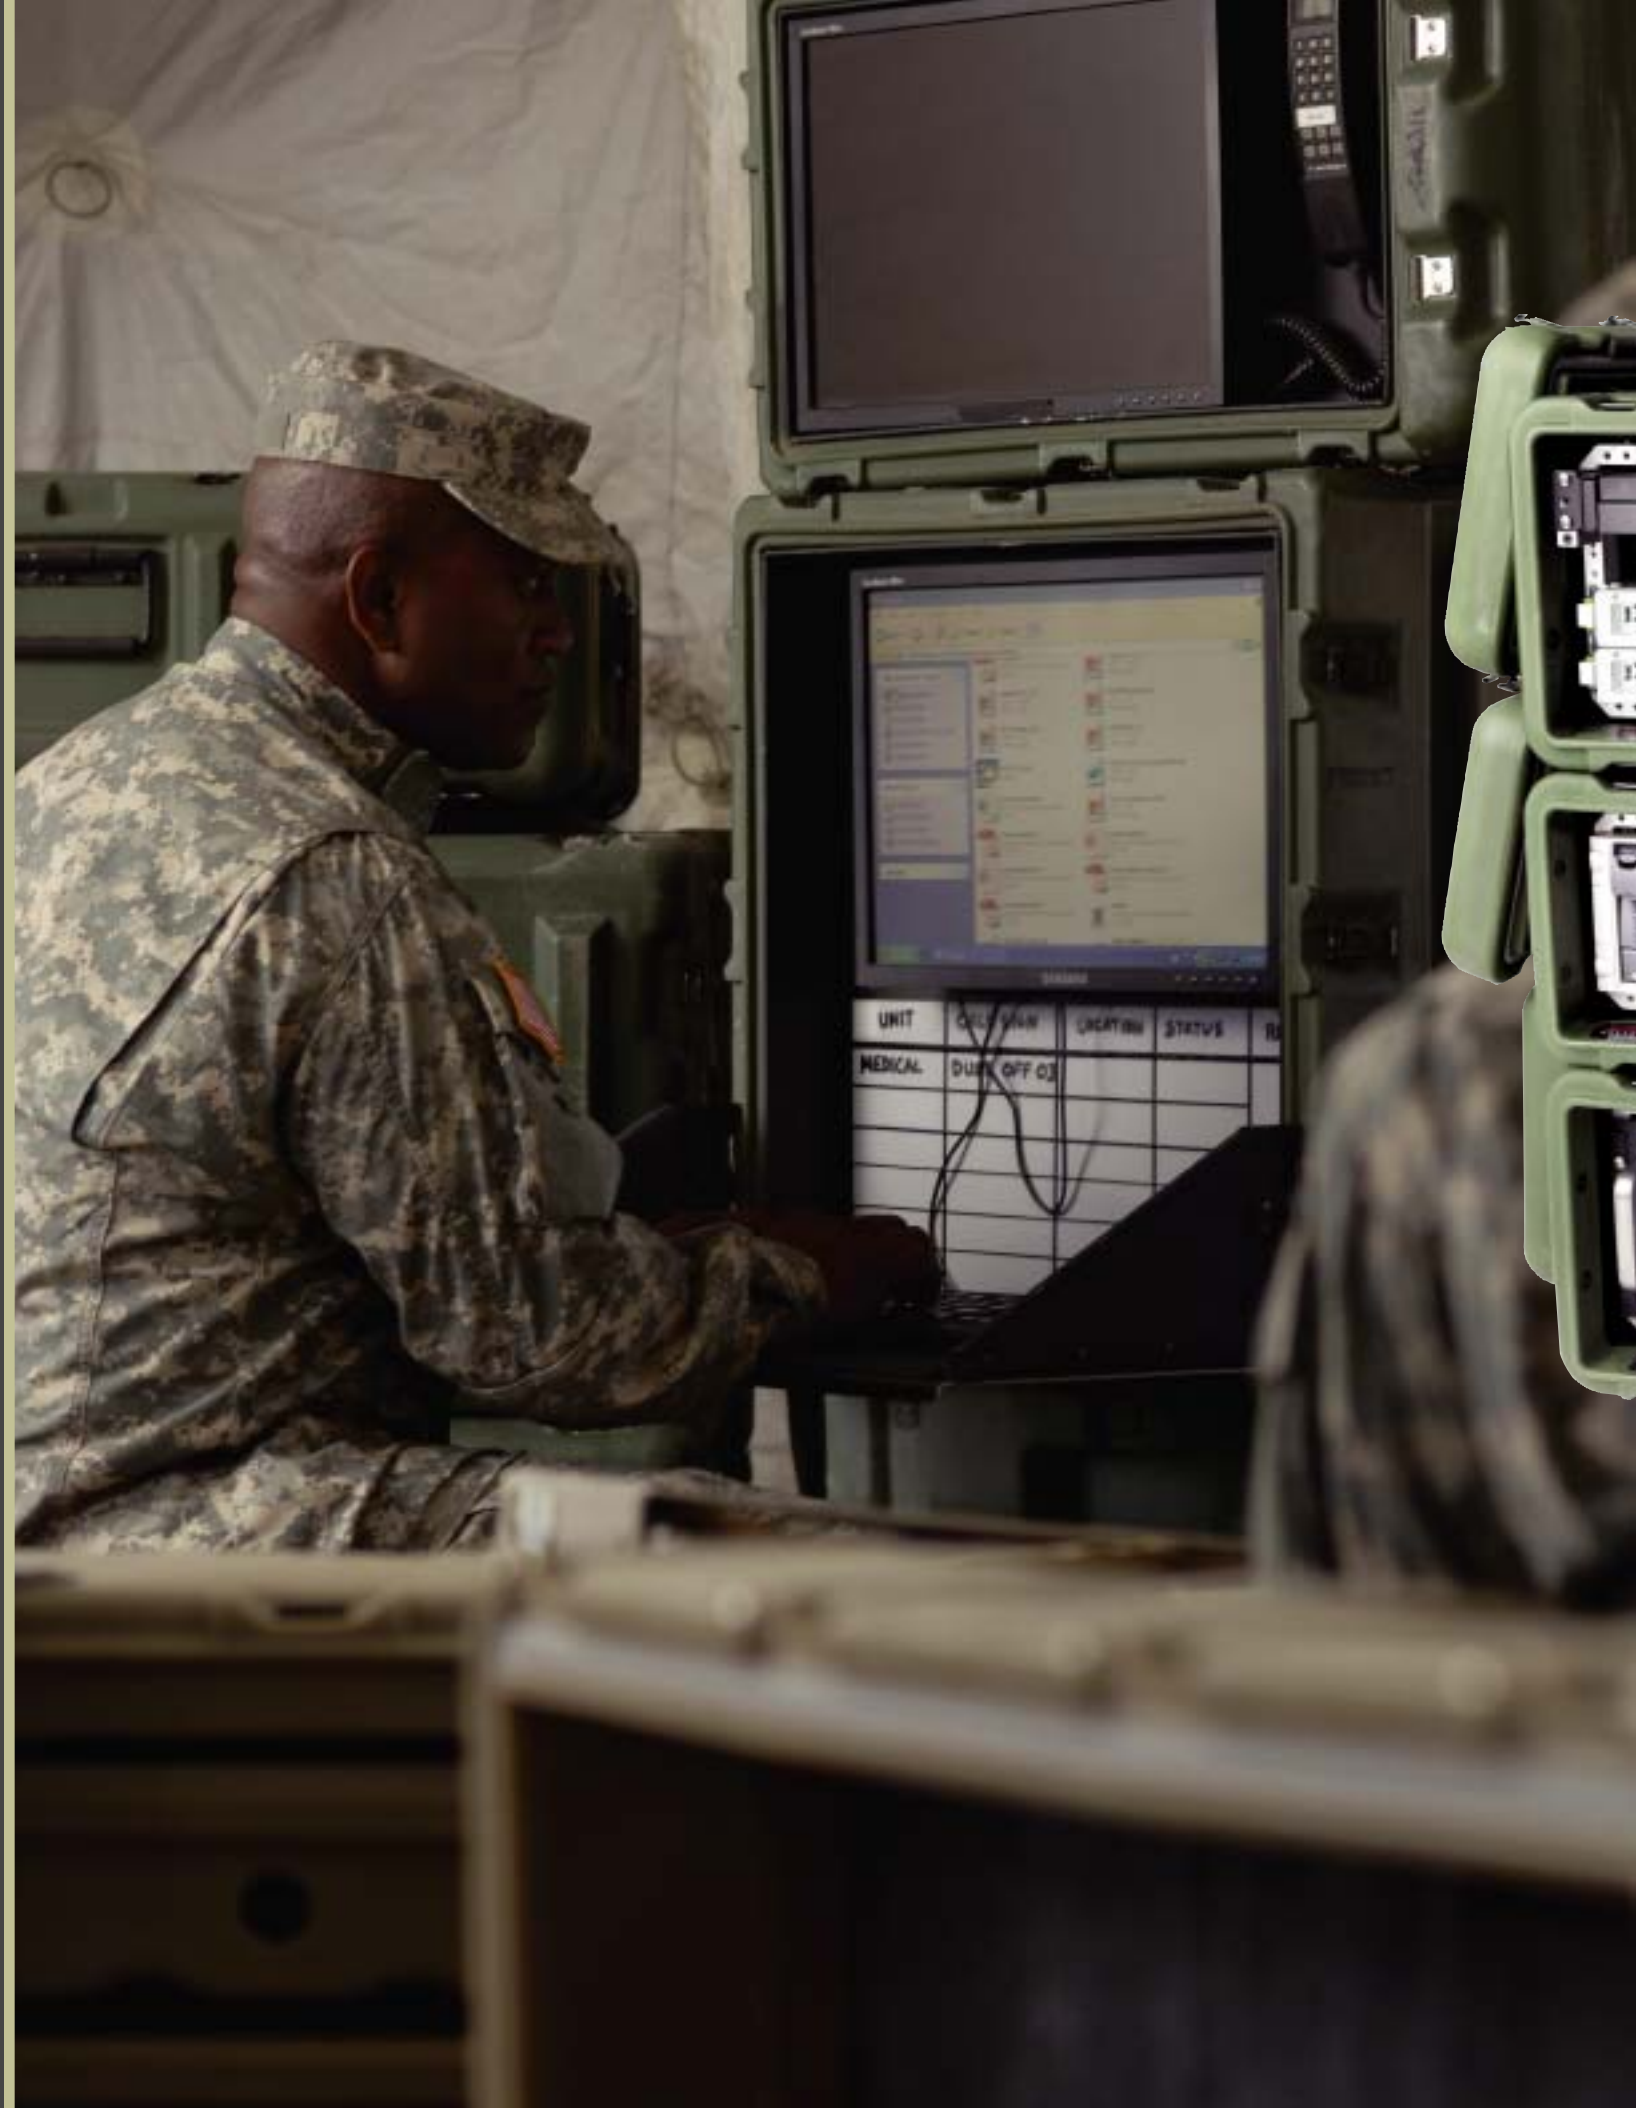

Compact and lightweight MAC Rack Cases boast a smaller footprint to make the most of limited space. These minimized cubes protect with the same rugged rotomolded outer shell and 19" EIA shock mounted rack as the Classic Cases, but with a smaller sway space. Inside, delicate equipment and instruments travel and perform while protected from shock, vibration, moisture, and impact. Perfect for shipping around the world or just moving down the hall – MAC Racks give you all the needed shock and vibration protection plus a more efficient use of space. Casters even come standard on the 5-inch-size lids for total portability. If it's versatility as well as protection you're looking for, MAC Rack is the case to get you there and back – again and again.

- Compact and lightweight.
- Shock mounts designed for 20-200 lbs. to provide some shock and vibration dampening and cooling airflow while minimizing the case size.
- Often used when space and weight are critical as well as some shock and vibration protection.
- Recessed, cobalt black hardware fastens tight and endures.
- Patented Comfort Grip Handles™ make lifting a pleasure.
- 5" lids include smooth rolling edge casters.




HARDIGG PRORACK CASES

MINIMAL FOOTPRINT

EQUIPMENT PROTECTION

ProRack Cases are the ideal option when you need a lightweight, space-efficient, front and rear opening container, but not a shock mounted system. Add accessories such as coupling catches for locking stability, removable casters or extra threaded rack clips to suit your exact needs. This is the toughest small case available for security from rain, dust and impact.

- Rugged 18" deep cases with aircraft aluminum frames suspended on plastic fins to protect your gear from direct impact transmission.
- Compact size and lightweight cases.
- Designed for equipment up to 75 lbs.
- Recessed, zinc-plated, yellow chromate hardware holds up under extreme conditions.
- Patented Comfort Grip Handles™ make lifting a pleasure.

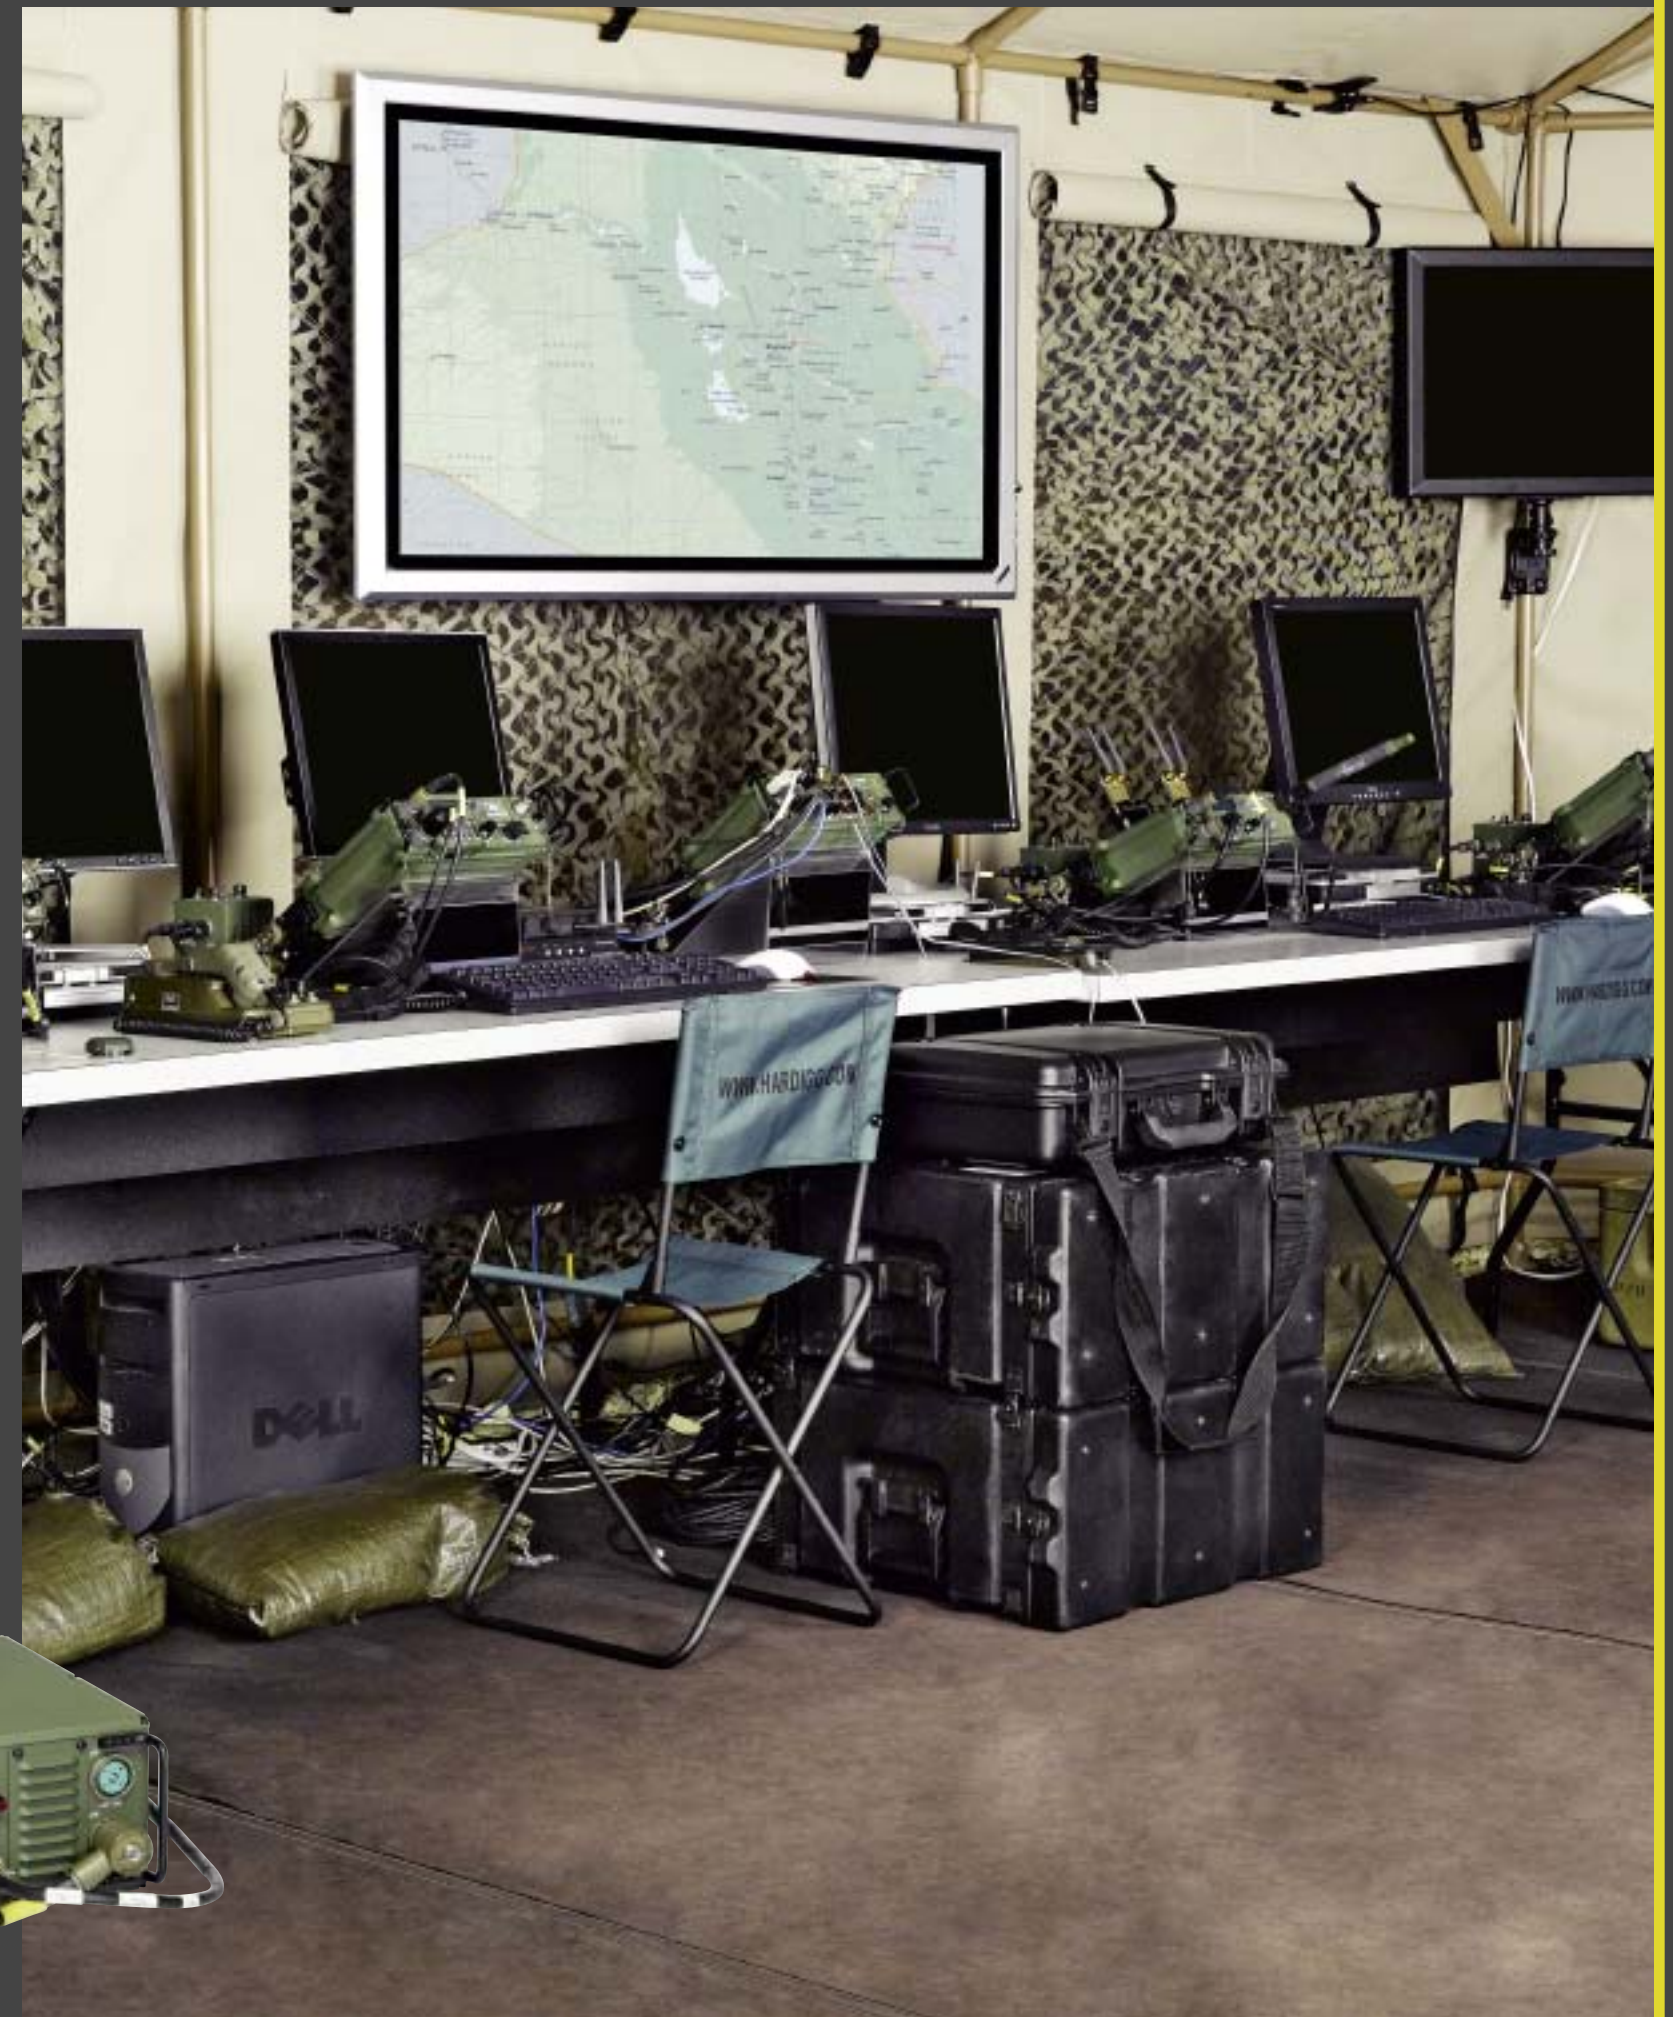

CLASSIC RACK, SUPERMAC & MAC RACK OPTIONS



Casters



Edge Casters
(Std. on MAC with 5" lid)



Caster Storage
in Lid




Metal or Comfort
Grip Handles



Leg Kit Chair or Table



Lockable Cable Catch
(1 set of 4 ea)




Removable Rack –
Rapid Rack™



Stainless Steel Hardware
(clear or black
passivated finish)




Extra Handles



Card Holder



ID Plate



Front Labels



1/8" Wider Frame– typically
used with slides mounted on
inside of uprights



Fixed Bottom
Support Rails
(bottom view)



Adjustable
Vertical Supports



Adjustable
Horizontal Supports



Standard Labels



Custom Stenciling



Airtight/Watertight
Capability



Coupling Catches



Bezel Plate



Drawers



Keyboard Tray




Rack Slides
(#85 Capacity)



Humidity Indicator



Lid Hangers



Lid Storage Pouch



Lift Rings/
Tie Down Rings



Shelves, Fixed
and Sliding



Panel Screws with
Washers (50 ea)

Optional colors (standard Gray)

	Gray – 133 Fed Std# 26270		Tan – 250 Fed Std# 20372		Blue – 135 (lt) Pantone# 292U
	Yellow – 131 Fed Std# 23538		Maroon – 197 Pantone# 202U		Blue – 101 (dk) Fed Std# 25052
	Yellow – 136 Pantone# 012U		Red – 130 Fed Std# 21105		Green – 138 (forest) Fed Std# 24052
	Orange – 134 Fed Std# 12197		Purple – 129 Pantone# 245U		Olive Drab – 137 Fed Std# 34096
	White – 132 Fed Std# 27925		Black – 032 Fed Std# 27040		

NOTE: Some options are not available on all case sizes.
Case colors may differ slightly from printed versions.

PRORACK OPTIONS



Casters



Card Holder



ID Plate



Front Labels



Custom Stenciling




Airtight/Watertight Capability



Coupling Catches



Stainless Steel Hardware (instead of standard zinc, yellow chromate finish)



Rear Rack Frame (rear view)



Bezel Plate



Drawer



Shelf



Panel Screws (50 ea)



Extra Threaded Rack Clips

Optional colors (standard Black)

Black – 032
Fed Std# 27040

Yellow – 131
Fed Std# 23538

Yellow – 136
Pantone# 012U

Orange – 134
Fed Std# 12197

Tan – 250
Fed Std# 20372

Maroon – 197
Pantone# 202U

Red – 130
Fed Std# 21105

Purple – 129
Pantone# 245U

Blue – 135 (lt)
Pantone# 292U

Blue – 101 (dk)
Fed Std# 25052

Green – 138 (forest)
Fed Std# 24052

Olive Drab – 137
Fed Std# 34096

White – 132
Fed Std# 27925

Gray – 133
Fed Std# 26270

NOTE: Some options are not available on all case sizes. Case colors may differ slightly from printed versions.

CLASSIC RACK SPECIFICATIONS

Part Number	Rack Height U-Size			Rack Length		Rack Width		Lid I.D. Front/Back ¹		Length O.D. ²		Width O.D.		Height O.D. ³		Weight		Shipping Cube	
	U	in	mm	in	mm	in	mm	in		in	mm	in	mm	in	mm	lbs	kg	ft ³	m ³
DE2410-02/24/02	3U	5.25	133	20	508	19	483	2.5 / 2.5		32.0	813	27	686	12.3	311	43	19.5	6.1	0.17
DE2410-02/24/05								2.5 / 5.25		34.8	883					44	20.0	6.7	0.19
DE2410-05/24/05								5.25 / 5.25		37.5	953					45	20.4	7.2	0.20
DE2412-02/24/02	4U	7.00	178	20	508	19	483	2.5 / 2.5		32.0	813	27	686	14.6	371	50	22.7	7.3	0.21
DE2412-02/24/05								2.5 / 5.25		34.8	883					51	23.1	7.9	0.22
DE2412-05/24/05								5.25 / 5.25		37.5	953					52	23.6	8.6	0.24
DE2414-02/24/02	5U	8.75	222	20	508	19	483	2.5 / 2.5		32.0	813	27	686	16.6	422	52	23.6	8.3	0.24
DE2414-02/24/05								2.5 / 5.25		34.8	883					54	24.5	9.0	0.26
DE2414-05/24/05								5.25 / 5.25		37.5	953					56	25.4	9.7	0.28
DE2414-02/27/02	5U	8.75	222	25	635	19	483	2.5 / 2.5		34.9	886	27	686	16.6	422	53	24.0	9.1	0.26
DE2414-02/27/05								2.5 / 5.25		37.6	956					55	24.9	9.8	0.28
DE2414-05/27/05								5.25 / 5.25		40.4	1026					57	25.9	10.5	0.30
DE2416-02/24/02	6U	10.50	267	20	508	19	483	2.5 / 2.5		32.0	813	27	686	18.6	473	56	25.4	9.3	0.26
DE2416-02/24/05								2.5 / 5.25		34.8	883					57	25.9	10.1	0.29
DE2416-05/24/05								5.25 / 5.25		37.5	953					59	26.8	10.9	0.31
DE2416-02/27/02	6U	10.50	267	25	635	19	483	2.5 / 2.5		34.9	886	27	686	18.6	473	57	25.9	10.1	0.29
DE2416-02/27/05								2.5 / 5.25		37.6	956					59	26.8	10.9	0.31
DE2416-05/27/05								5.25 / 5.25		40.4	1026					60	27.2	11.7	0.33
DE2418-02/20/02	7U	12.25	311	18	457	19	483	2.5 / 2.5		27.5	699	27	686	20.6	524	59	26.8	8.9	0.25
DE2418-02/20/05								2.5 / 5.25		30.3	768					61	27.7	9.7	0.28
DE2418-05/20/05								5.25 / 5.25		33.0	838					63	28.6	10.6	0.30
DE2418-02/27/02	7U	12.25	311	25	635	19	483	2.5 / 2.5		34.9	886	27	686	20.6	524	60	27.2	11.2	0.32
DE2418-02/27/05								2.5 / 5.25		37.6	956					62	28.1	12.1	0.34
DE2418-05/27/05								5.25 / 5.25		40.4	1026					64	29.0	13.0	0.37
DE2421-02/27/02	9U	15.75	400	25	635	19	483	2.5 / 2.5		34.9	886	27	686	24.3	616	70	31.8	13.2	0.37
DE2421-02/27/05								2.5 / 5.25		37.6	956					71	32.2	14.3	0.40
DE2421-05/27/05								5.25 / 5.25		40.4	1026					73	33.1	15.3	0.43
* DE2121-02/18/02	10U	17.50	445	17	432	19	483	2.5 / 2.5		25.5	648	24	610	24.3	616	47	21.3	8.6	0.24
* DE2121-02/18/05								2.5 / 5.25		28.3	718					49	22.2	9.5	0.27
* DE2121-05/18/05								5.25 / 5.25		31.0	787					51	23.1	10.4	0.30
* DE2121-02/30/02	10U	17.50	445	28	711	19	483	2.5 / 2.5		37.5	953	24	610	24.3	616	76	34.5	12.6	0.36
* DE2121-02/30/05								2.5 / 5.25		40.3	1022					78	35.4	13.6	0.38
* DE2121-05/30/05								5.25 / 5.25		43.0	1092					80	36.3	14.5	0.41
DE2425-02/27/02	11U	19.25	489	25	635	19	483	2.5 / 2.5		34.9	886	27	686	27.9	709	75	34.0	15.2	0.43
DE2425-02/27/05								2.5 / 5.25		37.6	956					78	35.4	16.4	0.46
DE2425-05/27/05								5.25 / 5.25		40.4	1026					81	36.7	17.6	0.50
DE2430-02/27/02	14U	24.50	622	25	635	19	483	2.5 / 2.5		34.9	886	27	686	33.0	838	79	35.8	18.0	0.51
DE2430-02/27/05								2.5 / 5.25		37.6	956					81	36.7	19.4	0.55
DE2430-05/27/05								5.25 / 5.25		40.4	1026					83	37.6	20.8	0.59
DE2442-02/27/02	21U	36.75	933	25	635	19	483	2.5 / 2.5		34.9	886	27	686	44.6	1133	103	46.7	24.3	0.69
DE2442-02/27/05								2.5 / 5.25		37.6	956					105	47.6	26.2	0.74
DE2442-05/27/05								5.25 / 5.25		40.4	1026					107	48.5	28.2	0.80
DE2652-02/25/02	26U	45.50	1156	23	584	19	483	2.5 / 2.5		32.5	826	29	737	54.6	1387	119	54.0	29.8	0.84
DE2652-02/25/05								2.5 / 5.25		35.3	895					121	54.9	32.3	0.91
DE2652-05/25/05								5.25 / 5.25		38.0	965					123	55.8	34.8	0.99


* Reduced Sway Space - Special shock mounts required
¹ - Lid Outside Dimension (O.D.) = Lid I.D. plus 1.25" per lid
² - Length includes stacking ribs
³ - Height excludes 1.0" stacking ribs

SUPERMAC SPECIFICATIONS

Part Number	Rack Height U-Size			Rack Length		Rack Width		Lid I.D. Front/Back ¹	Length O.D. ²		Width O.D. ³		Height O.D. ⁴		Weight		Shipping Cube	
	U	in	mm	in	mm	in	mm	in	in	mm	in	mm	in	mm	lbs	kg	ft ³	m ³
SMAC 2109-02/29/02	3U	5.25	133	24	610	19	483	2.2 / 2.2	35.5	902	23.8	603	11.4	289	48	21.8	5.5	0.16
SMAC 2109-02/29/05W								2.2 / 5.2	38.5	978					50	22.7	6.0	0.17
SMAC 2109-05/29/05W								5.2 / 5.2	41.5	1054					52	23.6	6.5	0.18
SMAC 2111-02/29/02	4U	7.00	178	24	610	19	483	2.2 / 2.2	35.5	902	23.8	603	13.1	333	51	23.1	6.4	0.18
SMAC 2111-02/29/05W								2.2 / 5.2	38.5	978					53	24.0	6.9	0.20
SMAC 2111-05/29/05W								5.2 / 5.2	41.5	1054					55	24.9	7.5	0.21
SMAC 2112-02/29/02	5U	8.75	222	24	610	19	483	2.2 / 2.2	35.5	902	23.8	603	14.9	378	53	24.0	7.3	0.21
SMAC 2112-02/29/05W								2.2 / 5.2	38.5	978					55	24.9	7.9	0.22
SMAC 2112-05/29/05W								5.2 / 5.2	41.5	1054					57	25.9	8.5	0.24
SMAC 2116-02/29/02	7U	12.25	311	24	610	19	483	2.2 / 2.2	35.5	902	23.8	603	18.4	467	57	25.9	9.0	0.25
SMAC 2116-02/29/05W								2.2 / 5.2	38.5	978					60	27.2	9.7	0.28
SMAC 2116-05/29/05W								5.2 / 5.2	41.5	1054					62	28.1	10.5	0.30
SMAC 2119-02/29/02	9U	15.75	400	24	610	19	483	2.2 / 2.2	35.5	902	23.8	603	21.9	556	61	27.7	10.7	0.30
SMAC 2119-02/29/05W								2.2 / 5.2	38.5	978					64	29.0	11.6	0.33
SMAC 2119-05/29/05W								5.2 / 5.2	41.5	1054					66	29.9	12.5	0.35
SMAC 2122-02/29/02	11U	19.25	489	24	610	19	483	2.2 / 2.2	35.5	902	23.8	603	25.4	644	66	29.9	12.4	0.35
SMAC 2122-02/29/05W								2.2 / 5.2	38.5	978					69	31.3	13.4	0.38
SMAC 2122-05/29/05W								5.2 / 5.2	41.5	1054					71	32.2	14.5	0.41
SMAC 2128-02/29/02	14U	24.50	622	24	610	19	483	2.2 / 2.2	35.5	902	23.8	603	30.6	778	71	32.2	14.9	0.42
SMAC 2128-02/29/05W								2.2 / 5.2	38.5	978					74	33.6	16.2	0.46
SMAC 2128-05/29/05W								5.2 / 5.2	41.5	1054					77	34.9	17.5	0.49

¹ - Lid Outside Dimension (O.D.) = Lid I.D. plus 1.3" on 5.2" lids and plus 1.1" on 2.2" lids
² - Length includes stiffening ribs, with metal handles installed
³ - Width listed is calculated with metal handles installed on sides
⁴ - Height excludes .44" stacking ribs

CLASSIC RACK, SUPERMAC AND MAC RACK DETAIL

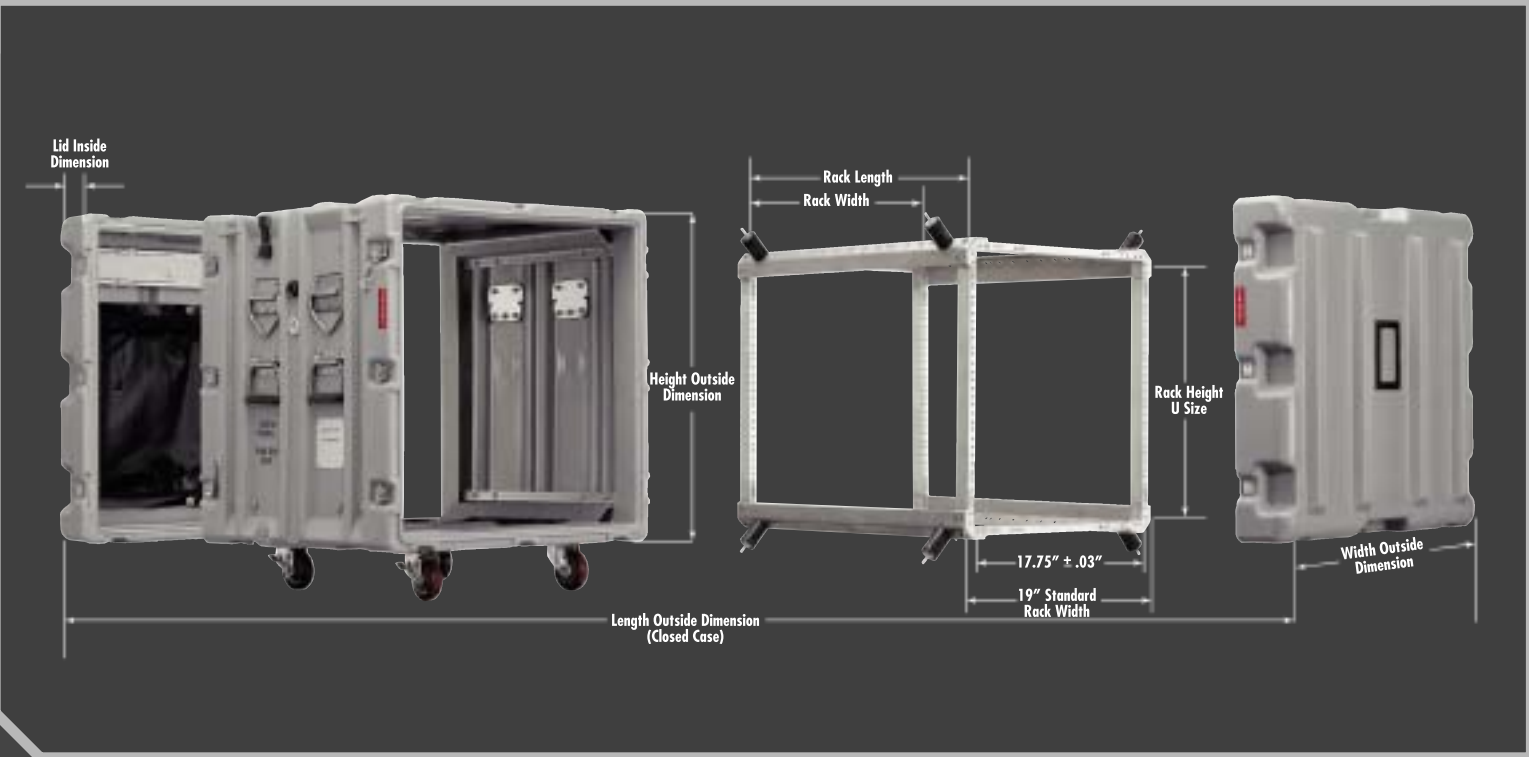

MAC RACK SPECIFICATIONS

Part Number	Rack Height U-Size			Rack Length		Rack Width		Lid I.D. Front/Back	Length O.D. ²		Width O.D. ³		Height O.D. ⁴		Weight		Shipping Cube	
	U	in	mm	in	mm	in	mm	in	in	mm	in	mm	in	mm	lbs	kg	ft ³	m ³
MR1907-02/25/02	3U	5.25	133	20	508	19	483	2.2 / 2.2	31.1	789	22.0	559	9.6	244	31	13.9	3.8	0.11
MR1907-02/25/05								2.2 / 4.4	33.6	853					32	14.5	4.1	0.12
MR1907-05/25/05								4.4 / 4.4	36.1	917					33	15.1	4.4	0.13
MR1907-02/29/02	3U	5.25	133	24	610	19	483	2.2 / 2.2	35.1	891	22.0	559	9.6	244	32	14.5	4.3	0.12
MR1907-02/29/05								2.2 / 4.4	37.6	955					33	15.0	4.6	0.13
MR1907-05/29/05								4.4 / 4.4	40.1	1019					34	15.4	4.9	0.14
MR1909-02/25/02	4U	7.00	178	20	508	19	483	2.2 / 2.2	31.1	789	22.0	559	11.4	289	33	15.2	4.5	0.13
MR1909-02/25/05								2.2 / 4.4	33.6	853					35	15.8	4.9	0.14
MR1909-05/25/05								4.4 / 4.4	36.1	917					36	16.3	5.2	0.15
MR1909-02/29/02	4U	7.00	178	24	610	19	483	2.2 / 2.2	35.1	891	22.0	559	11.4	289	35	15.6	5.1	0.14
MR1909-02/29/05								2.2 / 4.4	37.6	955					36	16.2	5.4	0.15
MR1909-05/29/05								4.4 / 4.4	40.1	1019					37	16.9	5.8	0.16
MR1910-02/25/02	5U	8.75	222	20	508	19	483	2.2 / 2.2	31.1	789	22.6	575	13.1	333	36	16.5	5.3	0.15
MR1910-02/25/05								2.2 / 4.4	33.6	853					38	17.1	5.8	0.16
MR1910-05/25/05								4.4 / 4.4	36.1	917					39	17.6	6.2	0.18
MR1910-02/29/02	5U	8.75	222	24	610	19	483	2.2 / 2.2	35.1	891	22.6	575	13.1	333	37	17.0	6.0	0.17
MR1910-02/29/05								2.2 / 4.4	37.6	955					39	17.6	6.5	0.18
MR1910-05/29/05								4.4 / 4.4	40.1	1019					40	18.1	6.9	0.20
MR1913-02/25/02	6U	10.50	267	20	508	19	483	2.2 / 2.2	31.1	789	22.6	575	14.9	378	39	17.8	6.1	0.17
MR1913-02/25/05								2.2 / 4.4	33.6	853					41	18.4	6.5	0.19
MR1913-05/25/05								4.4 / 4.4	36.1	917					42	19.0	7.0	0.20
MR1913-02/29/02	6U	10.50	267	24	610	19	483	2.2 / 2.2	35.1	891	22.6	575	14.9	378	40	18.3	6.8	0.19
MR1913-02/29/05								2.2 / 4.4	37.6	955					42	18.9	7.3	0.21
MR1913-05/29/05								4.4 / 4.4	40.1	1019					43	19.5	7.8	0.22
MR1914-02/25/02	7U	12.25	311	20	508	19	483	2.2 / 2.2	31.1	789	22.6	575	16.6	422	42	19.1	6.8	0.19
MR1914-02/25/05								2.2 / 4.4	33.6	853					43	19.5	7.3	0.21
MR1914-05/25/05								4.4 / 4.4	36.1	917					44	20.0	7.9	0.22
MR1914-02/29/02	7U	12.25	311	24	610	19	483	2.2 / 2.2	35.1	891	22.6	575	16.6	422	42	18.8	7.6	0.22
MR1914-02/29/05								2.2 / 4.4	37.6	955					44	20.1	8.2	0.23
MR1914-05/29/05								4.4 / 4.4	40.1	1019					47	21.3	8.7	0.25
MR1917-02/25/02	9U	15.75	400	20	508	19	483	2.2 / 2.2	31.1	789	22.6	575	20.2	512	46	20.9	8.2	0.23
MR1917-02/25/05								2.2 / 4.4	33.6	853					47	21.3	8.9	0.25
MR1917-05/25/05								4.4 / 4.4	36.1	917					48	21.9	9.5	0.27
MR1917-02/29/02	9U	15.75	400	24	610	19	483	2.2 / 2.2	35.1	891	22.6	575	20.2	512	47	21.3	9.3	0.26
MR1917-02/29/05								2.2 / 4.4	37.6	955					48	21.9	9.9	0.28
MR1917-05/29/05								4.4 / 4.4	40.1	1019					49	22.4	10.6	0.30
MR1921-02/25/02	11U	19.25	489	20	508	19	483	2.2 / 2.2	31.1	789	22.6	575	23.6	600	50	22.6	9.6	0.27
MR1921-02/25/05								2.2 / 4.4	33.6	853					51	23.1	10.4	0.29
MR1921-05/25/05								4.4 / 4.4	36.1	917					52	23.6	11.2	0.32
MR1921-02/29/02	11U	19.25	489	24	610	19	483	2.2 / 2.2	35.1	891	22.6	575	23.6	600	51	23.1	10.8	0.31
MR1921-02/29/05								2.2 / 4.4	37.6	955					52	23.6	11.6	0.33
MR1921-05/29/05								4.4 / 4.4	40.1	1019					53	24.1	12.4	0.35
MR1923-02/25/02	12U	21.00	533	20	508	19	483	2.2 / 2.2	31.1	789	22.6	575	25.4	644	52	23.5	10.3	0.29
MR1923-02/25/05								2.2 / 4.4	33.6	853					53	24.0	11.2	0.32
MR1923-05/25/05								4.4 / 4.4	36.1	917					54	24.6	12.0	0.34
MR1923-02/29/02	12U	21.00	533	24	610	19	483	2.2 / 2.2	35.1	891	22.6	575	25.4	644	53	24.0	11.7	0.33
MR1923-02/29/05								2.2 / 4.4	37.6	955					54	24.6	12.5	0.35
MR1923-05/29/05								4.4 / 4.4	40.1	1019					55	25.1	13.3	0.38
MR1926-02/25/02	14U	24.50	622	20	508	19	483	2.2 / 2.2	31.1	789	22.6	575	28.9	734	56	25.4	11.8	0.33
MR1926-02/25/05								2.2 / 4.4	33.6	853					57	25.7	12.7	0.36
MR1926-05/25/05								4.4 / 4.4	36.1	917					57	25.9	13.7	0.39
MR1926-02/29/02	14U	24.50	622	24	610	19	483	2.2 / 2.2	35.1	891	22.6	575	28.9	734	57	25.9	13.3	0.38
MR1926-02/29/05								2.2 / 4.4	37.6	955					58	26.1	14.2	0.40
MR1926-05/29/05								4.4 / 4.4	40.1	1019					58	26.4	15.2	0.43

PRORACK SPECIFICATIONS


Part Number	Rack Height U-Size			Rack Length		Rack Width		Lid I.D. Front/Back ¹		Length O.D. ²		Width O.D.		Height O.D. ³		Weight		Shipping Cube	
	U	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft ³	m ³
PR2008-01/18/01	4U	7.00	177.8	18	457	19	483	1.81	46	22	559	22.4	568	11.3	286	20.9	9.5	3.2	0.09
PR2012-01/18/01	6U	10.50	266.7	18	457	19	483	1.81	46	22	559	22.4	568	14.8	375	23.9	10.8	4.2	0.12
PR2015-01/18/01	8U	14.00	355.6	18	457	19	483	1.8	46	22	559	22.4	568	18.3	464	27.3	12.4	5.2	0.15
PR2026-01/18/01	14U	24.50	622.3	18	457	19	483	1.81	46	22	559	22.4	568	28.0	711	36.3	16.5	8.0	0.23

¹ - Lid Outside Dimension (O.D.) = Lid I.D. plus 0.2" per lid

² - Length includes stacking ribs

³ - Height excludes 0.5" stacking ribs

PRORACK DETAIL

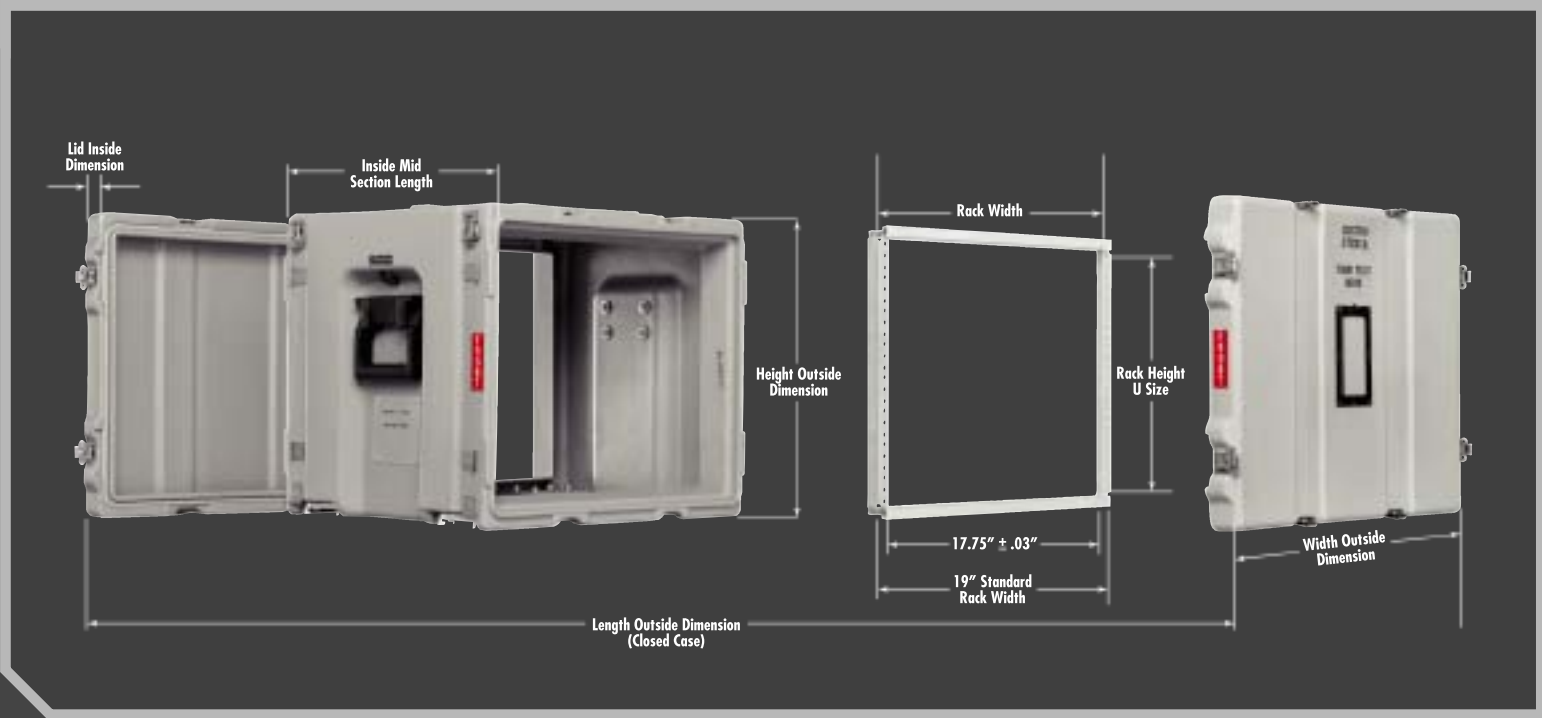

HARDIGG CASES
STANDARD AND CUSTOM SOLUTION EXPERTS

At Hardigg, we understand that a case has to do more than look good. It has to take whatever the world dishes out without putting your gear at risk. After all, your equipment is more than a set of tools – it's a fundamental part of the way you do business. Since 1954, Hardigg Cases has been designing cases to survive the harshest environments on earth, from the Sahara to the Antarctic. Our cases can take repeated drops, blows and soakings while our patented shell design and solid aircraft-quality rackmounts cushion your gear from interference. No other protective cases in the industry look or perform as well when it comes to safeguarding your vital or expensive equipment.

While Hardigg Cases offers the widest range of standard COTS (Commercial OffThe-Shelf) sizes and configurations in the container industry, many scientific, industrial, military, and commercial equipment systems require a customized solution.

If our selection of cases does not match your needs exactly, we will custom design a case that does. Call us at **1-800-542-7344**.





**CONTACT YOUR LOCAL HARDIGG DEALER
FOR MORE INFORMATION.**



HARDIGG CASES South Deerfield, MA 01373 • 800-542-7344 • Hardigg.com
HARDIGG UK Ashford, Kent, UK • +44(0) 1233 895895 • HardiggEurope.com
HARDIGG CANADA St-Jean-sur-Richelieu, QC • 450-348-2753 • Hardigg.com
HARDIGG FRANCE Saint Denis • 00 33 (0)1 48 13 15 50 • HardiggEurope.com

Trademarks Owned By Hardigg Industries, Inc. ©2008 Hardigg Industries, Inc.



8/08 #I46454