

Shuttle XP17 Lite – Stylish 17" TFT display

Complete your XPC with the Shuttle XP17! The first TFT display designed for the XPC. With a fast 16ms response time, high-res 1280 x 1024 pixel display and 450:1 contrast resolution, the XP17 delivers crystal clear images from any angle. Take it on the road, hang it on the wall or pose it on your desk – the XP17 with integrated aluminum handle and stand offers excellent flexibility. Better still when you travel, protect your investment with the carry bag. The XP17 integrates seamlessly in the Home, Office or Game center.


The XPC and XP17 – Where style meets performance.

Feature Highlight

| | |
|-----------------------------|---|
| Type | <ul style="list-style-type: none"> • 17.0" active panel TFT display • Resolution: 1280 x 1024 SXGA • Contrast: 450:1 • Brightness: 260 cd/m2 • Response time: 16ms • Weight: 4.3 kg net, 6.4 kg gross • Available color options: silver, black |
| Input | <ul style="list-style-type: none"> • Analog: D-Sub, Digital: DVI |
| Special features | <ul style="list-style-type: none"> • With integrated carrying handle for quick, easy portability • High-quality resistant rim with design screws in the corners • Portrait view gives more flexibility – great for viewing webpages and layout applications • VESA wall mount support |
| Optional accessories | <ul style="list-style-type: none"> • Carrying Bag for XP17 TFT (PF50) • VESA TFT Mounting Kit (PF18) |

Note: The specifications may be updated without notice.

| | | |
|-------------------|---|---|
| Product: | Monitor XP17 Lite | Monitor XP17 Lite |
| | Silver color | Black color |
| Order-No.: | MON-XP17SP4 | MON-XP17BP4 |
| UPC |  |  |
| bar code: | 8 11686 00481 3 | 8 11686 00480 6 |

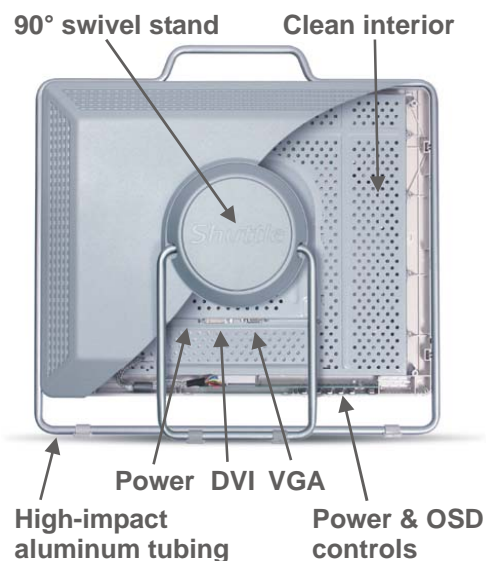

Date: 6. July 2005

Specification

| | |
|------------------------------|--|
| Color options | Silver, black |
| Panel frame | With integrated carrying handle for quick, easy portability High-quality resistant rim with design screws in the corners |
| Type | 17.0" active panel TFT display TN active-matrix TFT (Multi Domain Vertical Alignment) |
| Resolution | SXGA 1280 x 1024 |
| Brightness | 260 cd/m2 |
| Contrast Ratio | 450:1 |
| Viewing Angle | 140° x 140° |
| Response Time | 16ms |
| Color Resolution | 16.2 million (true color) |
| Pixel Pitch | 0.264 mm x 0.264 mm |
| Inputs | Analog: D-Sub (RGB) Digital: DVI (Digital Visual Interface) Frequency: H: 30~80KHz, V:60~75Hz |
| External Power supply | Input: 90 ~ 264V AC, 50/60 Hz Output: 12V DC Max. Power output of the Power Supply: 48W Max. Power Consumption: 36W (Saving Mode < 3W) |
| Basic Controls | Power, menu, up, down, select, auto adjust |
| OSD Controls | Auto image adjust, contrast, brightness, input select, color adjust [9300K, 6500K (default), RGB], information (mode, model number, frequency, resolution), image adjust (H. size, H. position, V. position, phase adjust, sharpness), language, OSD position. |
| Languages | English, Chinese (simplified & traditional), Japanese, German, French, Italian, Spanish |
| Mounting options | 1) Desk: Landscape, Portrait (Pivot Support: rotate by 90°) 2) VESA Wall mount support (100mm x 100mm) |
| Operating conditions | Temperature: 0~50°C Humidity: 10~90% (non-condensing) |
| Dimensions | 435mm x 423mm x 40mm (W x H x D) |
| Weight | Net: 4.3 kg, gross: 6.4 kg |
| Content of the box | Display, external power adapter (PSU), User's manual, Screen cleaning cloth, Power cable, Analog VGA D-Sub cable, Digital DVI cable |
| Certifications | CE, FCC, UL, 3C, PSE, TUV |
| Optional accessories | Carrying Bag for XP17 TFT (PF50), VESA TFT Mounting Kit (PF18) – not included |

Note: The specifications may be updated without notice.

Date: 6. July 2005