

Shuttle XP17 TempAG v2 – Stylish 17" TFT display

Complete your XPC with the Shuttle XP17! The first TFT display designed for the XPC. With a fast 8 ms response time, high-res 1280 x 1024 pixel display and 500:1 contrast resolution, the XP17 delivers crystal clear images from any angle. Take it on the road, hang it on the wall or pose it on your desk – the XP17 with integrated aluminum handle and stand offers excellent flexibility. Better still when you travel, protect your investment with the carry bag. The XP17 integrates seamlessly in the Home, Office or Game center.

The XPC and XP17 – Where style meets performance.

Feature Highlight

Type	<ul style="list-style-type: none"> • 17.0" active panel TFT display • Resolution: 1280 x 1024 SXGA • Contrast: 500:1 • Brightness: 300 cd/m2 • Response time: 8 ms • Weight: 4.9 kg net, 7 kg gross • Available color options: silver, black
Input	<ul style="list-style-type: none"> • Analog: D-Sub, Digital: DVI
Special features	<ul style="list-style-type: none"> • Tough, tempered glass – the glass safety panel protects against damage and reduces eye strain • With integrated carrying handle for quick, easy portability • Portrait view gives more flexibility – great for viewing webpages and layout applications • VESA wall mount support
Optional accessories	<ul style="list-style-type: none"> • Carrying Bag for XP17 TFT (PF50) • VESA TFT Mounting Kit (PF18)

Note: The specifications may be updated without notice.

Product: **Monitor XP17 TempAG v2 Silver color**



Order-No.: **MON-XP17SG31**

UPC bar code:



Product: **Monitor XP17 TempAG v2 Black color**

Order-No.: **MON-XP17BG31**

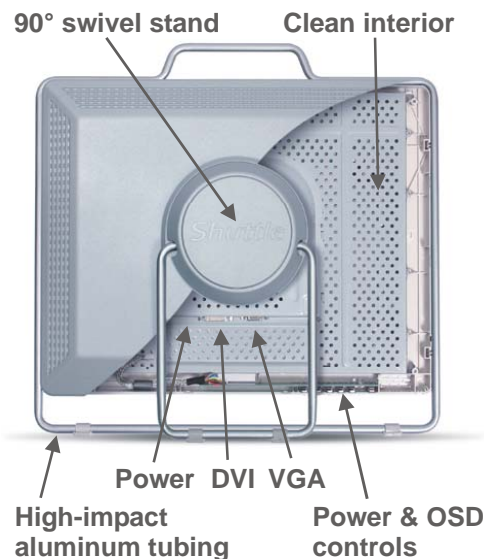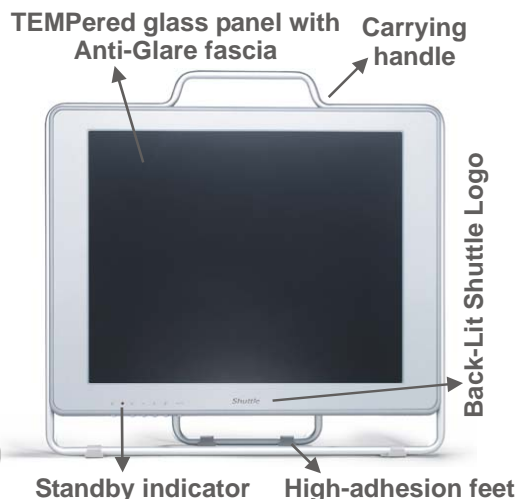

Date: 6. July 2005




reddot design award
winner 2005



gold award of excellence
Symbol of Excellence, Taiwan

Specification



Color options	Silver, black
Panel Surface	TempAR = TEMP ered glass panel with Anti-glare coating tempered glass: > Moh's hardness scale 8
Type	17.0" active panel TFT display TN active-matrix TFT (Multi Domain Vertical Alignment)
Resolution	SXGA 1280 x 1024
Brightness	300 cd/m2
Contrast Ratio	500:1
Viewing Angle	140° x 140°
Response Time	8 ms
Color Resolution	16.2 million (true color)
Pixel Pitch	0.264 mm x 0.264 mm
Inputs	Analog: D-Sub (RGB) Digital: DVI (Digital Visual Interface) Frequency: H: 30~80KHz, V:60~75Hz
External Power supply	Input: 90 ~ 264V AC, 50/60 Hz Output: 12V DC Max. Power output of the Power Supply: 48W Max. Power Consumption: 36W (Saving Mode < 3W)
Basic Controls	Power, menu, up, down, select, auto adjust
OSD Controls	Auto image adjust, contrast, brightness, input select, color adjust [9300K, 6500K (default), RGB], information (mode, model number, frequency, resolution), image adjust (H. size, H. position, V. position, phase adjust, sharpness), language, OSD position.
Languages	English, Chinese (simplified & traditional), Japanese, German, French, Italian, Spanish
Mounting options	1) Desk: Landscape, Portrait (Pivot Support: rotate by 90°) 2) VESA Wall mount support (100mm x 100mm)
Operating conditions	Temperature: 0~50°C, Humidity: 10~90% (non-condensing)
Dimensions	435mm x 423mm x 40mm (W x H x D)
Weight	Net: 4.9 kg, gross: 7 kg
Content of the box	Display, external power adapter (PSU), User's manual, Screen cleaning cloth, Power cable, Analog VGA D-Sub cable, Digital DVI cable
Certifications	CE, FCC, UL, 3C, PSE, TUV
Optional accessories	Carrying Bag for XP17 TFT (PF50), VESA TFT Mounting Kit (PF18) – not included

Note: The specifications may be updated without notice.

Date: 6. July 2005